

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** GLOBO Handels GmbH

**Supplier's address:** GLOBO Handels GmbH, Gewerbestraße 3, 9184 St. Peter, AT

**Model identifier:** 48042-40A

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	connection by soldering		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	40	Energy efficiency class	E
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	4 700 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3000...6500
On-mode power ( $P_{on}$ ), expressed in W	40,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	84
Outer dimensions without separate control gear, lighting control	Height	450	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	450	
	Depth	55	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,463 0,420
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	10	Survival factor	0,90
the lumen maintenance factor	0,95		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,98	Colour consistency in McAdam ellipses	2
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,1

(a)-: not applicable;

(b)-: not applicable;

## Lightsource Test Report

### Product Information

Product Type: 48042-40

Product Number: 1414


### CIE Colorimetric Parameters

Chromaticity coordinates:  $x=0.4585$   $y=0.4141$   $u(u')=0.2600$   $v=0.3523$   $v'=0.5285$   
 CCT:  $T_c=2747K$  ( $duv=0.00142$ ) Color Ratio:  $R=0.250$   $G=0.735$   $B=0.015$   
 Peak Wavelength: 609.2nm Half Bandwidth: 129.0nm  
 Dominant Wavelength: 583.5nm Color Purity: 0.620  
 Central Wave: 593.8nm Gravity Wave: 598.9nm  
 CRI:  $R_a=83.0$  TM30:  $R_f=83$ ,  $R_g=99$   
 GAI:  $GAI\_BB\_8=92.3$ ,  $GAI\_BB\_15=98.6$ ,  $GAI\_EES=46.2$   

R1 =82	R2 =89	R3 =95	R4 =84	R5 =82	R6 =87	R7 =84	R8 =61
R9 =10	R10=74	R11=85	R12=67	R13=84	R14=96	R15=74	

Color Quality Scale:  $Q_a=82.1$ ,  $Q_f=83.9$ ,  $Q_p=84.4$ ,  $Q_g=93.0$   

Q1 =76	Q2 =95	Q3 =82	Q4 =82	Q5 =83	Q6 =81	Q7 =81	Q8 =86
Q9 =96	Q10=88	Q11=87	Q12=86	Q13=85	Q14=72	Q15=74	

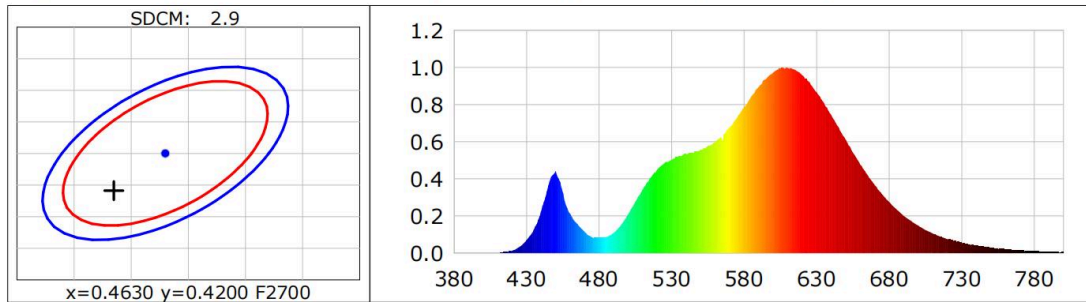

### Photometric Parameters

Luminous Flux: 4722.7 lm Efficiency: 122.92 lm/W Radiant Power: 14.216 W  
 Total mains efficacy: 122.92 lm/W Energy Efficiency Class: E (EU 2019/2015)

### Electric Parameters

Voltage: 229.20V Current: 0.1720A Power: 38.42W  
 Power Factor: 0.9720 Frequency: 50.00Hz


### Test Information

Scan Range: 380~800:1nm	Photometric Method: sphere-spectroradiometer
Stabilization Time: 0 Sec ALC.: 1.0000	Photometric Condition: Sphere diameter: 1.50m, 4π
Max of Signal: 44935 (3237)	CCD Integration Time: 155.59 ms

Condition:  $T_x:23.4^{\circ}C$ ,  $T_i:22.0^{\circ}C$ , R.H.:60%  
 Test Lab:  
 Operator:

Test Device: CMS-2S (Plus)  
 Test Time: 2025-01-06 15:15:05  
 Inspector:

Model placed on the Union market from 10/05/2025



**EPREL registration number:** 2354905

<https://eprel.ec.europa.eu/qr/2354905>

**Supplier:** Globo Handels GmbH (Manufacturer)

**Website:**

**Customer care service:**

**Name:** GLOBO Handels GmbH

**Website:**

**Email:** [office@globo-lighting.com](mailto:office@globo-lighting.com)

**Phone:** +43425332050

**Address:**

Gewerbestraße 3  
9184 St. Peter  
Austria