

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: GLOBO Handels GmbH

Supplier's address: GLOBO Handels GmbH, Gewerbestraße 3, 9184 St. Peter, AT

Model identifier: 48042-40W

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	connection by soldering		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	40	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	4 700 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3000...6500
On-mode power (P_{on}), expressed in W	40,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	84
Outer dimensions without separate control gear, lighting control	Height	450	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	450	
	Depth	55	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,463 0,420
Parameters for LED and OLED light sources:			
R9 colour rendering index value	15	Survival factor	0,90
the lumen maintenance factor	0,95		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,98	Colour consistency in McAdam ellipses	2
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,1

(a)-: not applicable;

(b)-: not applicable;

Lightsource Test Report

Product Information

Product Type: 48042-40

Product Number: 1414


CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4585$ $y=0.4141$ $u(u')=0.2600$ $v=0.3523$ $v'=0.5285$
 CCT: $T_c=2747K$ ($duv=0.00142$) Color Ratio: $R=0.250$ $G=0.735$ $B=0.015$
 Peak Wavelength: 609.2nm Half Bandwidth: 129.0nm
 Dominant Wavelength: 583.5nm Color Purity: 0.620
 Central Wave: 593.8nm Gravity Wave: 598.9nm
 CRI: $R_a=83.0$ TM30: $R_f=83$, $R_g=99$
 GAI: $GAI_BB_8=92.3$, $GAI_BB_15=98.6$, $GAI_EES=46.2$

R1 =82	R2 =89	R3 =95	R4 =84	R5 =82	R6 =87	R7 =84	R8 =61
R9 =10	R10=74	R11=85	R12=67	R13=84	R14=96	R15=74	

Color Quality Scale: $Q_a=82.1$, $Q_f=83.9$, $Q_p=84.4$, $Q_g=93.0$

Q1 =76	Q2 =95	Q3 =82	Q4 =82	Q5 =83	Q6 =81	Q7 =81	Q8 =86
Q9 =96	Q10=88	Q11=87	Q12=86	Q13=85	Q14=72	Q15=74	

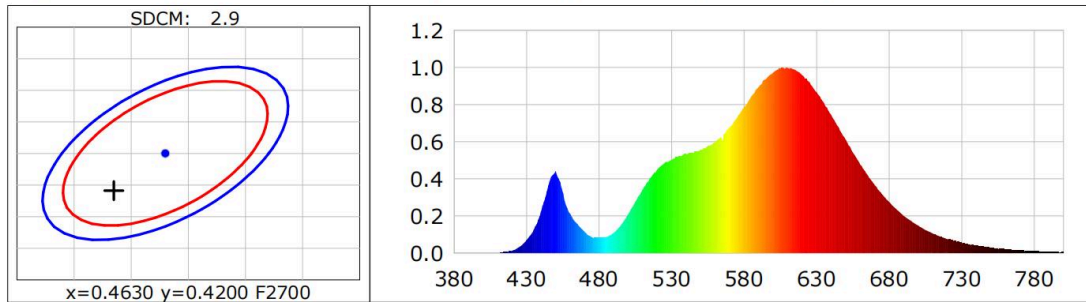

Photometric Parameters

Luminous Flux: 4722.7 lm Efficiency: 122.92 lm/W Radiant Power: 14.216 W
 Total mains efficacy: 122.92 lm/W Energy Efficiency Class: E (EU 2019/2015)

Electric Parameters

Voltage: 229.20V Current: 0.1720A Power: 38.42W
 Power Factor: 0.9720 Frequency: 50.00Hz


Test Information

Scan Range: 380~800:1nm	Photometric Method: sphere-spectroradiometer
Stabilization Time: 0 Sec ALC.: 1.0000	Photometric Condition: Sphere diameter: 1.50m, 4π
Max of Signal: 44935 (3237)	CCD Integration Time: 155.59 ms

Condition: $T_x:23.4^{\circ}C$, $T_i:22.0^{\circ}C$, R.H.:60%
 Test Lab:
 Operator:

Test Device: CMS-2S (Plus)
 Test Time: 2025-01-06 15:15:05
 Inspector:

Model placed on the Union market from 10/05/2025



EPREL registration number: 2354907

<https://eprel.ec.europa.eu/qr/2354907>

Supplier: Globo Handels GmbH (Manufacturer)

Website:

Customer care service:

Name: GLOBO Handels GmbH

Website:

Email: office@globo-lighting.com

Phone: +43425332050

Address:

Gewerbestraße 3
9184 St. Peter
Austria