

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: GLOBO Handels GmbH

Supplier's address: GLOBO Handels GmbH, Gewerbestraße 3, 9184 St. Peter, AT

Model identifier: 48469

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	36	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	4 275 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000 or 4 000 or 6 500
On-mode power (P_{on}), expressed in W	36,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	500	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	500	
	Depth	35	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,440 0,403
Parameters for LED and OLED light sources:			
R9 colour rendering index value	11	Survival factor	1,00
the lumen maintenance factor	0,90		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,99	Colour consistency in McAdam ellipses	4
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a)-: not applicable;

(b)-: not applicable;


Spectrum Test Report

Sample :	Date : 2025-05-08
Specification :	Standardtus :
Sample No. : 8	Instrument : HaasSuite(EVERFINE)
Manufacturer :	Test by : Allen
Assessor :	
Remark :	

Test Condition

Temperature : 25.0Deg	RH : 63%
WL Range : 380nm-780nm	IP : 48461 (74%)
Test Mode : Fast Test	T : 39 ms
Sensitivity : High	

Spectrum

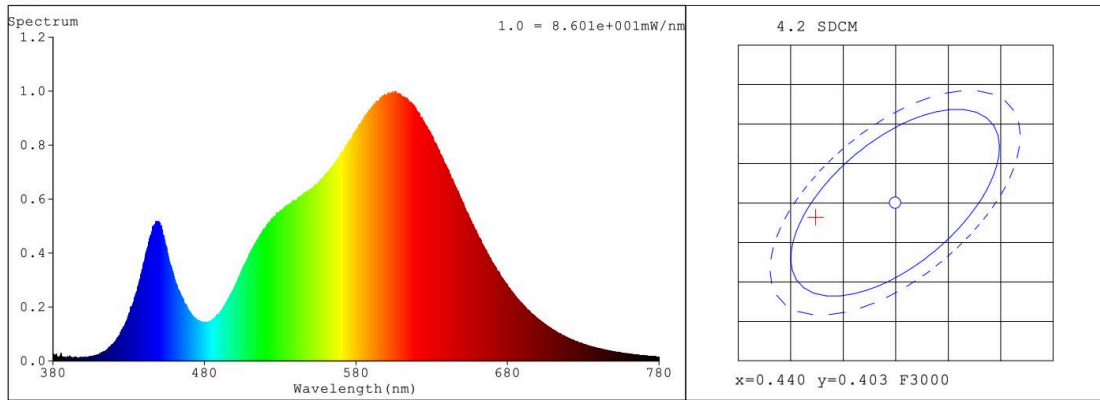

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4324$ $y = 0.4012$ / $u' = 0.2489$ $v' = 0.5196$ ($duv = -4.26e-04$)
 CCT= 3054K Prcp WL: Ld=582.8nm Purity=50.2%
 Peak WL: Lp=606nm FWHM: =137.0nm Ratio:R=22.7% G=75.2% B=2.2%

Render Index: Ra = 82.6

R1 =81 R2 =89 R3 =95 R4 =82 R5 =81 R6 =86 R7 =85
 R8 =62 R9 =11 R10=73 R11=82 R12=68 R13=83 R14=97 R15=75
 WHITE:ANSI_3000K

Photometric & Radiometric Parameters


Flux = 4275.4 lm Eff. : 117.26 lm/W Fe = 12.973 W

Electrical parameters

V = 229.99 V I = 0.1649 A P = 36.46 W PF = 0.9610 F=49.99 Hz

Guangdong GTG Testing Technology Co., Ltd.

Model placed on the Union market from 19/05/2025



EPREL registration number: 2362826

<https://eprel.ec.europa.eu/qr/2362826>

Supplier: Globo Handels GmbH (Manufacturer)

Website:

Customer care service:

Name: GLOBO Handels GmbH

Website:

Email: office@globo-lighting.com

Phone: +43425332050

Address:

Gewerbestraße 3
9184 St. Peter
Austria