

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: NOWA

Supplier's address: GLOBO Handels GmbH, Gewerbestraße 3, 9184 St. Peter, AT

Model identifier: 31549308

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter		Value	Parameter	Value
General product parameters:				
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer		24	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		3 000 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W		24,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control	Height	35	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width	35		
	Depth	1		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,437 0,405	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	4	Survival factor	0,90	
the lumen maintenance factor	0,96			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	1,00	Colour consistency in McAdam ellipses	2	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4	

(a) '-': not applicable;

(b) '-': not applicable;

LED Test Report

Product Mark

Product Type :31549308

Temperature :26'C


Operator :01

Remark:

Manufacturer :IN

Humidity :65%

Test Date :2025-05-08 18:48:30

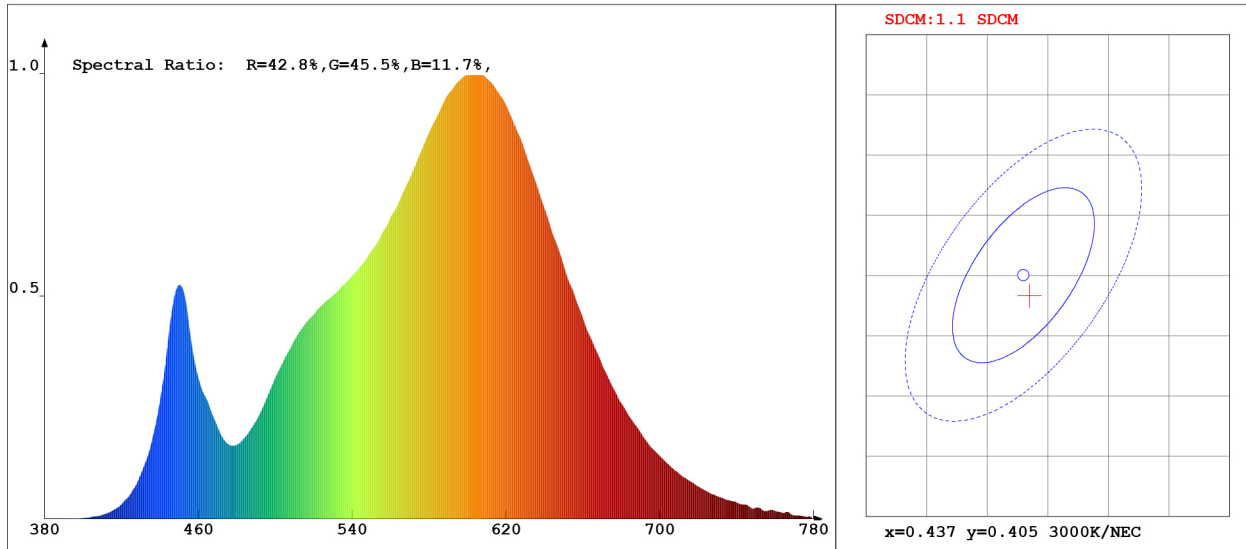**Chroma Parameters**

Chro.Coar.:x=0.4375 y=0.4033 u=0.2513 v=0.3474 duv=-0.0004

CCT: 2984K Dominant Wave.:583.0nm Purity:52.4%

Flux RGB Ratio:R=23.0%,G=75.6%,B=1.5% Peak Wave:606.7nm Half Width:125.7nm

Rendering Index:Ra= 82.1

R1 =80	R2 =90	R3 =97	R4 =81	R5 =81	R6 =89	R7 =82	R8 =57
R9 =4	R10=78	R11=81	R12=72	R13=82	R14=99	R15=72	

Photo Parameters

Flux:3016.06lm Effi.:125lm/W Radiant:10745.9mW Ri:0.0mW/sr

Efficiency:0.109 Effi Level:A++ (EU 874-2012)

Ele. Parameters

Voltage:U=229.900V

Current:I=0.1130A

Power:P=24.89W

Power Factor:PF=0.952

Lamp Parameters

Voltage:U=229.900V

Current:I=0.1130A

Power:P=24.88W

Power Factor:PF=0.952

Efficacy:0.0lm/W

Instrument state

Instrument:Hopoo HP8000S


Integral Time: 19.200ms

VPeak: 13080

VDark: 1185

Product ID: 201710386

Model placed on the Union market from 01/08/2025.



EPREL registration number: 2434284

<https://eprel.ec.europa.eu/qr/2434284>

Supplier: Globo Handels GmbH (Manufacturer)

Website:

Customer care service:

Name: GLOBO Handels GmbH

Website:

Email: office@globo-lighting.com

Phone: +43425332050

Address:

Gewerbestraße 3
9184 St. Peter
Austria