

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: GLOBO Handels GmbH

Supplier's address: GLOBO Handels GmbH, Gewerbestraße 3, 9184 St. Peter, AT

Model identifier: 15743SL

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	SMD		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	23	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	2 781 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700 or 4 000 or 6 500
On-mode power (P_{on}), expressed in W	22,8	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	83
Outer dimensions without separate control gear, lighting control	Height	148	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	148	
	Depth	2	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,460 0,420
Parameters for LED and OLED light sources:			
R9 colour rendering index value	9	Survival factor	0,94
the lumen maintenance factor	0,98		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,87	Colour consistency in McAdam ellipses	1
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,1

(a)-: not applicable;

(b)-: not applicable;

Lightsource Test Report

Product Information

Product Type: 15743ASL
Product Number: 裸测-2700K

Product Spec: 落地灯


CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4638$ $y=0.4178$ $u(u')=0.2618$ $v=0.3538$ $v'=0.5307$
 CCT: $T_c=2701K$ ($duv=0.00231$) Color Ratio: $R=0.252$ $G=0.727$ $B=0.021$
 Peak Wavelength: 608.7nm Half Bandwidth: 115.8nm
 Dominant Wavelength: 583.5nm Color Purity: 0.647
 Central Wave: 601.6nm Gravity Wave: 604.1nm
 CRI: $R_a=83.4$ TM30: $R_f=87$ $R_g=95$
 GAI: $GAI_BB_8=85.1$, $GAI_BB_15=92.1$, $GAI_EES=41.4$

R1 =82	R2 =91	R3 =97	R4 =83	R5 =83	R6 =92	R7 =82	R8 =59
R9 =9	R10=81	R11=84	R12=76	R13=84	R14=99	R15=73	TLCI=68

Color Quality Scale: $Q_a=84.0$, $Q_f=86.6$, $Q_p=83.8$, $Q_g=88.7$

Q1 =78	Q2 =93	Q3 =87	Q4 =85	Q5 =86	Q6 =86	Q7 =86	Q8 =89
Q9 =95	Q10=92	Q11=89	Q12=87	Q13=85	Q14=72	Q15=74	

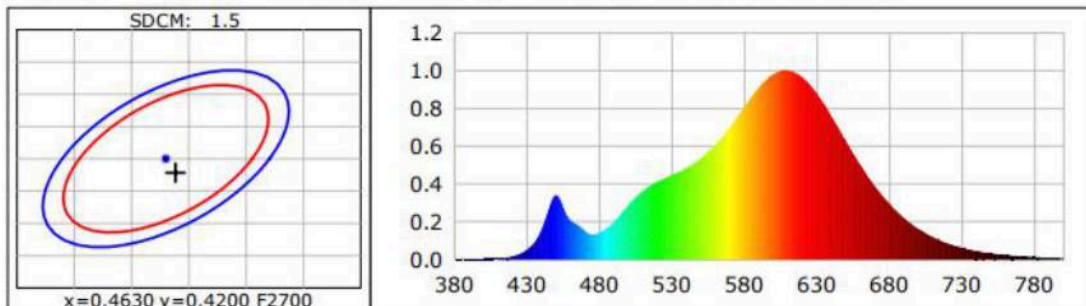

Photometric Parameters

Luminous Flux: 2558.6 lm Efficiency: 112.02 lm/W Radiant Power: 7.802 W
 Total mains efficacy: 112.02 lm/W Energy Efficiency Class: E (EU 2019/2015)
 Melanin Flux: 1.354 W M/R: 0.4404 MDER: 0.4008

Electric Parameters

Voltage: 230.20V Current: 0.1730A Power: 22.84W
 Power Factor: 0.5730 Frequency: 60.00Hz


Test Information

Scan Range: 380~800:1nm Photometric Method: sphere-spectroradiometer
 Stabilization Time: 0 Min ALC.: 1.0000 Photometric Condition: Sphere diameter: 1.50m, 4T
 Max of Signal: 46098 (2787) CCD Integration Time: 79.67 ms

Condition: $T_x:31.6^{\circ}C$, $T_i:29.3^{\circ}C$, R.H.:60%
 Test Lab:
 Operator:

Test Device: CMS-2S (Plus)
 Test Time: 2024-08-03 15:41:08
 Inspector:

Model placed on the Union market from 30/08/2025



EPREL registration number: 2445164

<https://eprel.ec.europa.eu/qr/2445164>

Supplier: Globo Handels GmbH (Importer)

Website:

Customer care service:

Name: GLOBO Handels GmbH

Website:

Email: office@globo-lighting.com

Phone: +43425332050

Address:

Gewerbestraße 3
9184 St. Peter
Austria