

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Globo Handels GmbH

Supplier's address: GLOBO Handels GmbH, Gewerbestraße 3, 9184 St. Peter, AT

Model identifier: 58504SN

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	NO		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	Yes	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	7	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	704 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700 or 3 350 or 4 000
On-mode power (P_{on}), expressed in W	6,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,50
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without separate control gear, lighting control	Height	2	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	80	
	Depth	80	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,366 0,364
Parameters for LED and OLED light sources:			
R9 colour rendering index value	-9	Survival factor	1,00
the lumen maintenance factor	0,96		

(a) : not applicable;

(b) : not applicable;

Lightsource Test Report (1/2)

Product Information

Product Type: 1

Product Number: 349


CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3666$ $y=0.3649$ $u(u')=0.2207$ $v=0.3294$ $v'=0.4942$
 CCT: $T_c=2725K$ ($duv=-0.00137$) Color Ratio: $R=0.172$ $G=0.790$ $B=0.038$
 Peak Wavelength: 449.8nm Half Bandwidth: 16.3nm
 Dominant Wavelength: 578.7nm Color Purity: 0.195
 CRI: $R_a=81.0$ TM30: $R_f=81$, $R_g=95$
 GAI: $GAI_BB_8=92.6$, $GAI_BB_15=99.5$, $GAI_EES=77.4$

R1 =79	R2 =88	R3 =94	R4 =81	R5 =80	R6 =84	R7 =83	R8 =59
R9 =-9	R10=72	R11=80	R12=57	R13=82	R14=97	R15=72	

Color Quality Scale: $Q_a=79.7$, $Q_f=79.8$, $Q_p=80.1$, $Q_g=91.7$

Q1 =79	Q2 =98	Q3 =76	Q4 =72	Q5 =79	Q6 =82	Q7 =84	Q8 =88
Q9 =97	Q10=87	Q11=83	Q12=81	Q13=80	Q14=67	Q15=71	

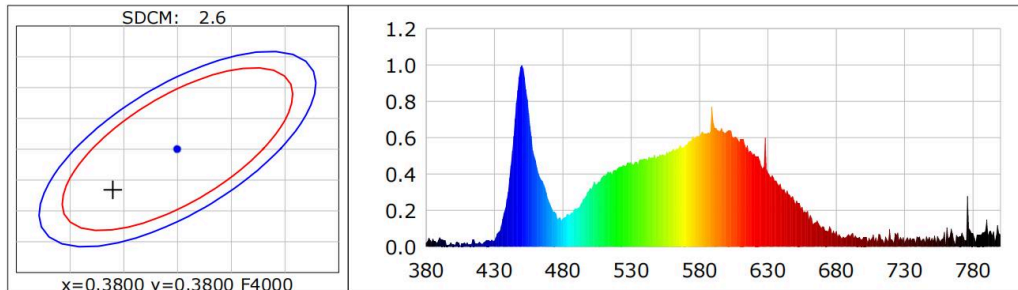

Photometric Parameters

Luminous Flux: 704.13 lm	Efficiency: 109.16lm/W	Radiant Power: 0.129 W
Total mains efficacy: 109.16lm/W	Energy Efficiency Class: F (EU 2019/2015)	
Pupil Flux: 957.63Plm	Pupil Lumens Per Watt: 148.47Plm/W	Pupil Factor (Kp): 1.560

Electric Parameters

Voltage: 231.50V	Current: 0.0290A	Power: 6.45W
Power Factor: 0.4360	Frequency: 50.00Hz	


Test Information

Scan Range: 380~800:1nm	Photometric Method: sphere-spectroradiometer
Stabilization Time: 0 Min ALC.: 1.0000	Photometric Condition: Sphere diameter: 1.50m, 4T
Max of Signal: 4189 (2312)	CCD Integration Time: 1000.00 ms

Condition: $T_x=21.6^\circ C$, $T_i=22.5^\circ C$, R.H.:60%
 Test Lab:
 Operator:

Test Device: Inventfine CMS-2S (Plus)
 Test Time: 2025-08-27 16:13:02
 Inspector:

Model placed on the Union market from 31/08/2025



EPREL registration number: 2457951

<https://eprel.ec.europa.eu/qr/2457951>

Supplier: Globo Handels GmbH (Importer)

Website:

Customer care service:

Name: GLOBO Handels GmbH

Website:

Email: office@globo-lighting.com

Phone: +43425332050

Address:

Gewerbestraße 3
9184 St. Peter
Austria