

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** UIMAGE

**Supplier's address:** UIMAGE ApS, Havnegade 29, 1058 Copenhagen, DK

**Model identifier:** 2684 (light-source)

**Type of light source:**

|                                                     |                           |                                 |                            |
|-----------------------------------------------------|---------------------------|---------------------------------|----------------------------|
| Lighting technology used:                           | LED                       | Non-directional or directional: | NDLS                       |
| Light source cap-type (or other electric interface) | Custom PCB with LED SMD's |                                 |                            |
| Mains or non-mains:                                 | NMLS                      | Connected light source (CLS):   | No                         |
| Colour-tuneable light source:                       | No                        | Envelope:                       | -                          |
| High luminance light source:                        | No                        |                                 |                            |
| Anti-glare shield:                                  | No                        | Dimmable:                       | Only with specific dimmers |


## Product parameters

| Parameter                                                                                                                                             | Value                  | Parameter                                                                                                                                                  | Value                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| <b>General product parameters:</b>                                                                                                                    |                        |                                                                                                                                                            |                        |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer                                                                         | 12                     | Energy efficiency class                                                                                                                                    | D                      |
| Useful luminous flux ( $\phi_{\text{use}}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 1 760 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2 700                  |
| On-mode power ( $P_{\text{on}}$ ), expressed in W                                                                                                     | 11,4                   | Standby power ( $P_{\text{sb}}$ ), expressed in W and rounded to the second decimal                                                                        | 0,00                   |
| Networked standby power ( $P_{\text{net}}$ ) for CLS, expressed in W and rounded to the second decimal                                                | -                      | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set                                                         | 92                     |
| Outer dimensions without separate control gear, light-                                                                                                | Height                 | Spectral power distribution in the range 250 nm to 800 nm, at full-load                                                                                    | See image in last page |
|                                                                                                                                                       | Width                  |                                                                                                                                                            |                        |
|                                                                                                                                                       | Depth                  |                                                                                                                                                            |                        |


|                                                                       |      |                                    |                |  |
|-----------------------------------------------------------------------|------|------------------------------------|----------------|--|
| ing control parts and non-lighting control parts, if any (millimetre) |      |                                    |                |  |
| Claim of equivalent power <sup>(a)</sup>                              | -    | If yes, equivalent power (W)       | -              |  |
|                                                                       |      | Chromaticity coordinates (x and y) | 0,456<br>0,403 |  |
| <b>Parameters for LED and OLED light sources:</b>                     |      |                                    |                |  |
| R9 colour rendering index value                                       | 59   | Survival factor                    | 1,00           |  |
| the lumen maintenance factor                                          | 0,96 |                                    |                |  |

(a) '-': not applicable;

(b) '-': not applicable;

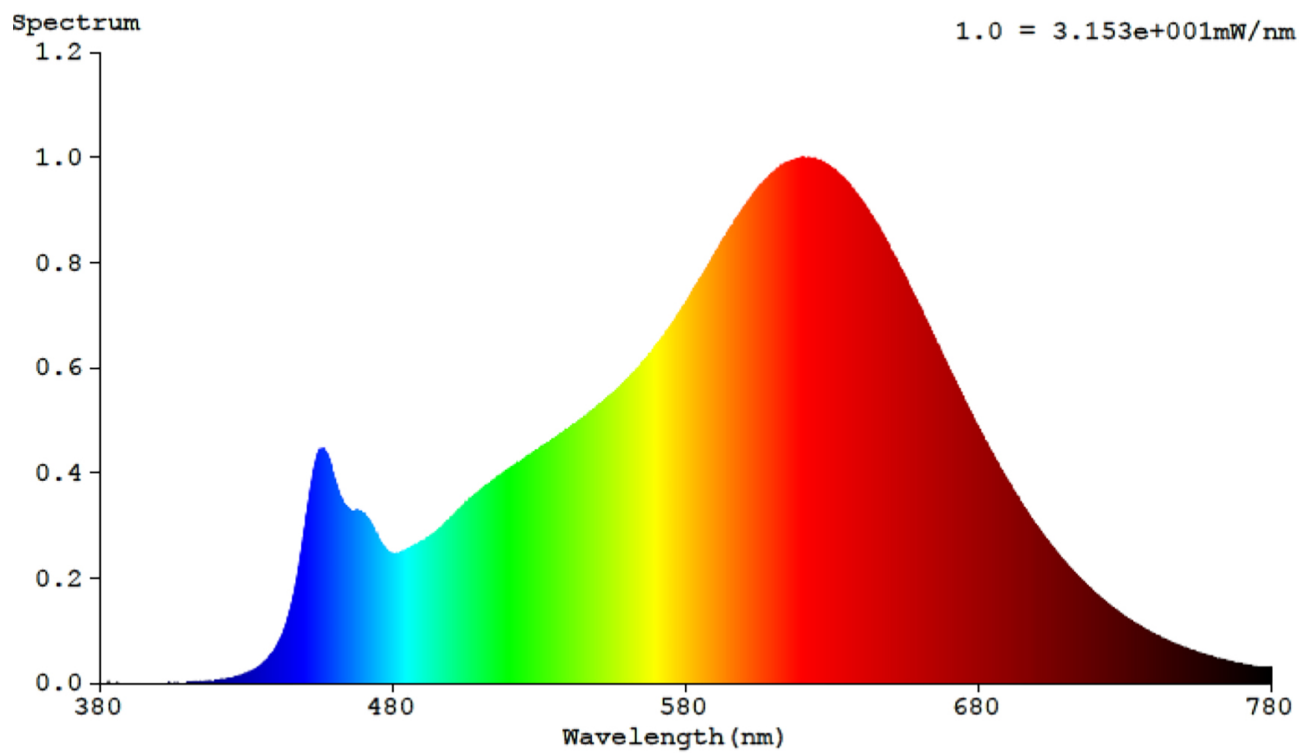

Model placed on the Union market from 04/09/2025



**EPREL registration number:** 2458480

<https://eprel.ec.europa.eu/qr/2458480>

**Supplier:** UIMAGE ApS (Manufacturer)

**Website:** [www.umage.com](http://www.umage.com)

**Customer care service:**

**Name:** UIMAGE ApS

**Website:** [www.umage.com](http://www.umage.com)

**Email:** [info@umage.com](mailto:info@umage.com)

**Phone:** +45 31 39 31 31

**Address:**

Havnegade 29  
1058 Copenhagen  
Denmark