

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: GLOBO Handels GmbH

Supplier's address: GLOBO Handels GmbH, Gewerbestraße 3, 9184 St. Peter, AT

Model identifier: 67396D

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	24	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	3 016 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700 or 4 000 or 6 000
On-mode power (P_{on}), expressed in W	24,4	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,40
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control	Height	180	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	465	
	Depth	465	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,326 0,340
Parameters for LED and OLED light sources:			
R9 colour rendering index value	17	Survival factor	0,90
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,92	Colour consistency in McAdam ellipses	1
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,3	Stroboscopic effect metric (SVM)	0,1

(a)-: not applicable;

(b)-: not applicable;


Spectrum Test Data

Sample	:	Date	:	2025-10-30
Specification	:	Sam. Status	:	
Sample No.	:	Instrument	:	HaasSuite(EVERFINE)
Manufacturer	:	Test by	:	XIAOXIN
		Assessor	:	damin

Test Condition

Temperature	:	24.5Deg	RH	:	60%
WL Range	:	380nm-780nm	IP	:	53713 (82%)
Test Mode	:	Fast Test	T	:	233 ms
			Sensitivity	:	High

Spectrum

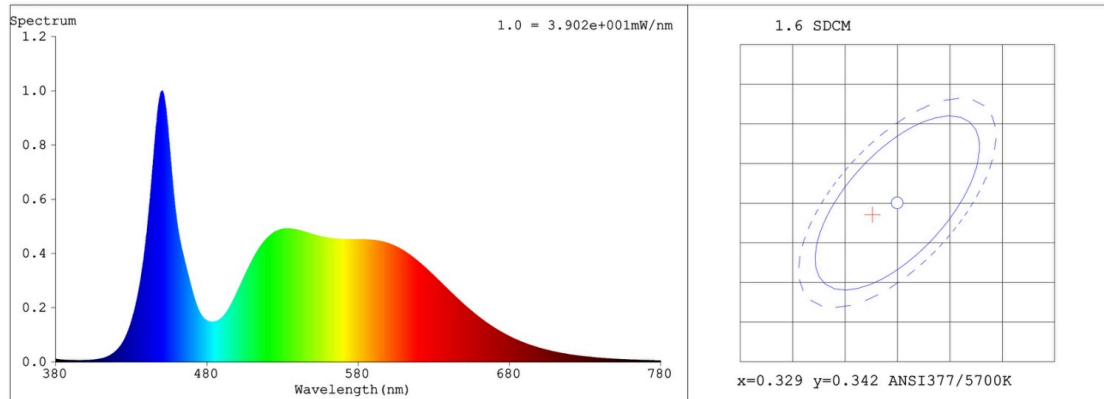

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.3263$ $y = 0.3402$ / $u' = 0.2030$ $v' = 0.4762$ ($duv=2.34e-03$)
 CCT= 5775K Prcp WL: Ld=505.1nm Purity=2.1%
 Peak WL: Lp=451nm FWHM: =20.1nm Ratio:R=14.7% G=81.1% B=4.3%

Render Index: Ra = 82.6

R1 =83 R2 =85 R3 =85 R4 =85 R5 =83 R6 =79 R7 =88
 R8 =73 R9 =17 R10=63 R11=84 R12=55 R13=83 R14=91 R15=79


Photometric & Radiometric Parameters

Flux = 3016.5 lm Eff. : 123.81 lm/W Fe = 3.8182 W

Electrical parameters

V = 220.0 V I = 0.1165 A P = 24.36 W PF = 0.9488 F=49.99 Hz

Model placed on the Union market from 06/11/2025.



EPREL registration number: 2524690

<https://eprel.ec.europa.eu/qr/2524690>

Supplier: Globo Handels GmbH (Manufacturer)

Website:

Customer care service:

Name: GLOBO Handels GmbH

Website:

Email: office@globo-lighting.com

Phone: +43425332050

Address:

Gewerbestraße 3
9184 St. Peter
Austria