

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Searchlight Electric

Supplier's address: Quality, Head Of QA The Black Church St Mary's Place 1 D07P4AX Dublin

Model identifier: 35110-5SA

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters


Parameter		Value	Parameter	Value
General product parameters:				
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer		35	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		2 461 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W		34,8	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	84
Outer dimensions without separate control gear, lighting control	Height	200	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width	150		
	Depth	150		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,423 0,394	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	11	Survival factor	0,90	
the lumen maintenance factor	0,96			

(a) : not applicable;

(b) : not applicable;

Product Mark
Product Type : 35110-48A-C
Temperature : admin°C
Operator : admin
Remark:
Manufacturer :
Humidity : 65%
Test Date : 2026-06-29 14:55:49

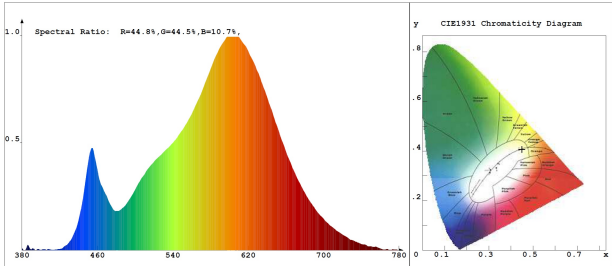

Chroma Parameters
Chro.Coord.:x=0.4494 y=0.4070 u=0.2573 v=0.3496 duv=-0.0004
CCT: 2825K Dominant Wave.:583.7nm Purity:57.1%
Flux RGB Ratio:R=24.1%,G=74.4%,B=1.6% Peak Wave:606.6nm Half Width:115.9nm

Rendering Index:Ra= 81.6
R1 =80 R2 =92 R3 =95 R4 =79 R5 =81 R6 =91 R7 =80 R8 =55
R9 =4 R10=81 R11=79 R12=72 R13=83 R14=98 R15=72

Photo Parameters
Flux:1954.56lm Effi.:68.8lm/W Radiant:5296.0mW Iv:0.0cmd
Efficiency:0.24 Effi Level:C (EU 874-2012)

Ele. Parameters
Voltage:U=232.900V Current:I=0.1240A
Power:P=28.40W Power Factor:PF=0.982

Lamp Parameters
Voltage:U=232.900V Current:I=0.1240A Power:P=28.40W
Power Factor:PF=0.982 Efficacy:0.0lm/W

Instrument state
Instrument:Hopoo HP80008 Integral Time: 660.502ms VPeak: 14614
VDark: 1426 Product ID: 201508922

EPREL registration number: 2785426

Model placed on the Union market from 09/07/2026.



<https://eprel.ec.europa.eu/qr/2785426>

Supplier: SEARCHLIGHT ELECTRIC INTERNATIONAL LIMITED (Importer)

Website: www.searchlightelectric.com

Customer care service:

Name: Quality

Website: www.searchlightelectric.com

Email: Tlam@searchlightelectric.com

Phone: 01612033451

Address:

Head Of QA
The Black Church
St Mary's Place 1
D07P4AX
Dublin