

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Searchlight Electric

Supplier's address: Quality, Head Of QA The Black Church St Mary's Place 1 D07P4AX Dublin

Model identifier: 10321-1

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter		Value	Parameter	Value
General product parameters:				
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer		7	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		498 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W		6,7	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	83
Outer dimensions without separate control gear, lighting control	Height	200	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width	200		
	Depth	200		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,467 0,414	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	8	Survival factor	1,00	
the lumen maintenance factor	0,96			

(a) : not applicable;

(b) : not applicable;

Sample :
Specification : 10321-1BZ 1L pendant light with shade
Sample No. : 19
Manufacturer :
Assessor : damin
Remark :
Device SN :


Date : 2026-01-06
Sam. Status :
Standard :
Instrument : HaasSuite(EVERFINE)
Test by : xiaoxin

Test Condition

Temperature : 24.5Deg
WL Range : 380nm-780nm
Test Mode : Fast Test
Sensitivity : High

RH : 60.0%
IP : 51805 (79%)
T : 416 ms

Spectrum

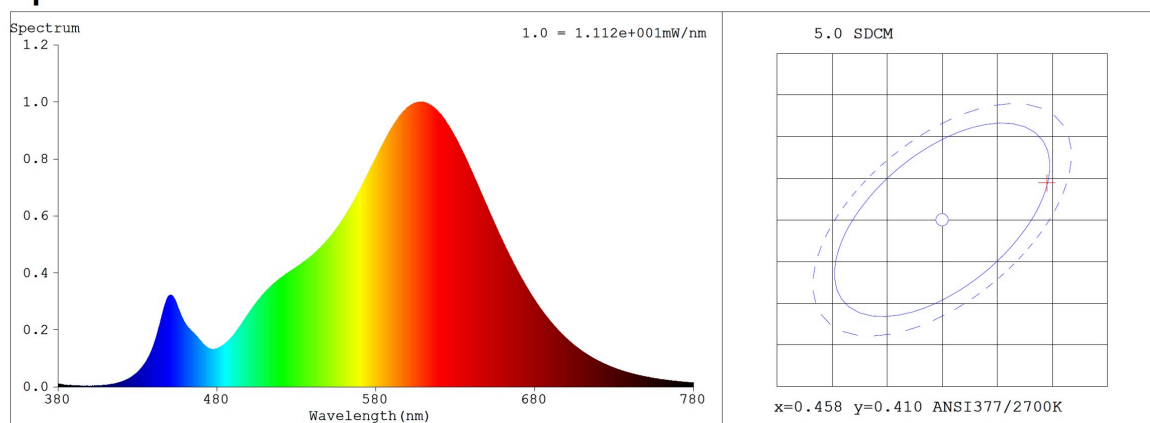

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4673$ $y = 0.4145$ / $u' = 0.2655$ $v' = 0.5300$ ($duv=8.56e-04$)
CCT= 2629K Prcp WL: Ld=584.3nm Purity=64.7%
Peak WL: Lp=607nm FWHM: =113.8nm Ratio:R=25.7% G=72.2% B=2.0%
Render Index: Ra = 82.7

EEL: 0.15289 A+

R1 =81 R2 =91 R3 =96 R4 =81 R5 =81 R6 =91 R7 =82
R8 =58 R9 =8 R10=81 R11=81 R12=76 R13=83 R14=99 R15=73

Photometric & Radiometric Parameters

Flux = 497.84 lm Eff. : 73.95 lm/W Fe = 1.5430 W

Electrical parameters

V = 220.08 V I = 0.03252 A P = 6.732 W PF = 0.9393 F=49.99 Hz

EPREL registration number: 2787374

Model placed on the Union market from 10/07/2026.



<https://eprel.ec.europa.eu/qr/2787374>

Supplier: SEARCHLIGHT ELECTRIC INTERNATIONAL LIMITED (Importer)

Website: www.searchlightelectric.com

Customer care service:

Name: Quality

Website: www.searchlightelectric.com

Email: Tlam@searchlightelectric.com

Phone: 01612033451

Address:

Head Of QA
The Black Church
St Mary's Place 1
D07P4AX
Dublin