## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

## Supplier's name or trade mark: SYLVANIA

**Supplier's address:** Product Compliance, Feilo Sylvania International Group Kft. Duna Tower -Building B, 3rd Floor, Népfürdö Street 22, Budapest H-1138 Hungary

## Model identifier: 0029371

## Type of light source:


| Lighting technology used:     | LED | Non-directional or directional: | NDLS |  |  |
|-------------------------------|-----|---------------------------------|------|--|--|
| Light source cap-type         | E14 |                                 |      |  |  |
| (or other electric interface) |     |                                 |      |  |  |
| Mains or non-mains:           | MLS | Connected light source (CLS):   | No   |  |  |
| Colour-tuneable light source: | No  | Envelope:                       | -    |  |  |
| High luminance light source:  | No  |                                 |      |  |  |
| Anti-glare shield:            | No  | Dimmable:                       | No   |  |  |
| Product parameters            |     |                                 |      |  |  |

| Parameter                              |   | Value                   | Parameter  | Value        |  |  |
|--|---|-------------------------|--|--------------|--|--|
| General product parameters:            |   |                         |  |              |  |  |
| 0,                                     | nption in on-<br>00 h), rounded<br>st integer                                   | 3                       | Energy efficiency<br>class   | F            |  |  |
| dicating if it refe<br>a sphere (360°) | s flux (φuse), in-<br>ers to the flux in<br>, in a wide cone<br>rrow cone (90º) | 250 in<br>Sphere (360°) | Correlated colour<br>temperature,<br>rounded to the near-<br>est 100 K, or the<br>range of correlat-<br>ed colour temper-<br>atures, rounded to<br>the nearest 100 K,<br>that can be set | 2 700        |  |  |
| On-mode pow<br>pressed in W            | ver (P <sub>on</sub> ), ex-   | 2,5                     | Standby power (P <sub>sb</sub> ),<br>expressed in W and<br>rounded to the sec-<br>ond decimal  | 0,00         |  |  |
| ( $P_{net}$ ) for CLS, e               | andby power<br>expressed in W<br>the second dec-                                | -                       | Colour rendering in-<br>dex, rounded to the<br>nearest integer, or<br>the range of CRI-val-<br>ues that can be set   | 80           |  |  |
| Outer dimen-                           | Height  | 97                      | Spectral power dis-  | See image    |  |  |
| sions without                          | Width   | 35                      | tribution in the   | in last page |  |  |
| separate con-<br>trol gear, light-     | Depth   | 35                      | range 250 nm to 800<br>nm, at full-load  |              |  |  |

| ing control<br>parts and non-<br>lighting con-<br>trol parts, if<br>any (millime-<br>tre)              |                        |  |       |  |  |  |
|--|------------------------|--|-------|--|--|--|
| Claim of equivalent pov  | ver <sup>(a)</sup> Yes | If yes, equivalent power (W)             | 25    |  |  |  |
|  |                        | Chromaticity coordi-                     | 0,458 |  |  |  |
|  |                        | nates (x and y)                          | 0,410 |  |  |  |
| Parameters for LED and OLED light sources:   |                        |  |       |  |  |  |
| R9 colour rendering ind  | ex value 1             | Survival factor                          | 1,00  |  |  |  |
| the lumen maintenance  | e factor 0,94          |  |       |  |  |  |
| Parameters for LED and OLED mains light sources:   |                        |  |       |  |  |  |
| displacement factor (cc  | s ф1) 0,70             | Colour consistency<br>in McAdam ellipses | 6     |  |  |  |
| Claims that an LED ligh<br>replaces a fluoresce<br>source without integra<br>last of a particular watt | nt light<br>ted bal-   | If yes then replace-<br>ment claim (W)   | -     |  |  |  |
| Flicker metric (Pst LM)  | 1,0                    | Stroboscopic effect<br>metric (SVM)      | 0,4   |  |  |  |

(a)<sub>'-'</sub> : not applicable;

(b)'-' : not applicable;

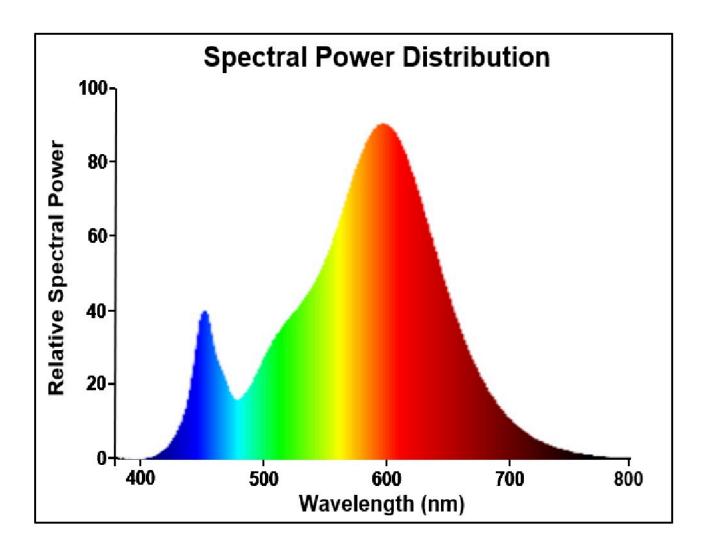

Model placed on the Union market from 09/07/2021 EPREL registration number: 542844 https://eprel.ec.europa.eu/qr/542844 Supplier: Feilo Sylvania International Group Kft. (Manufac Website: www.sylvania-lighting.com turer) **Customer care service:** Name: Product Compliance Website: www.sylvania-lighting.com Email: product.compliance@sylvania-lighting.com Phone: +36 1 88 05 900 Address: Feilo Sylvania International Group Kft. Duna Tower - Building B, 3rd Floor, Népfürdö Street 22, **Budapest** H-1138 Hungary