## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SYLVANIA

Supplier's address: Product Compliance, Feilo Sylvania International Group Kft. Duna Tower -

Building B, 3rd Floor, Népfürdö Street 22, Budapest H-1138 Hungary

|       |       |          | 0000000 |
|-------|-------|----------|---------|
|       | או וכ | Antitiar | 0029136 |
| IVIOU | -1 1  | ciilici. | UUZJIJU |


| т., | nn | Λf | امزا | h+  | 50 |   | co. |
|-----|----|----|------|-----|----|---|-----|
| ıу  | hΕ | UI | IIBI | IΙL | 30 | u | ce: |

| LED  | Non-directional or directional: | DLS   |
|------|---------------------------------|---|
| GU10 |                                 |   |
|      |                                 |   |
| MLS  | Connected light source (CLS):   | No  |
| No   | Envelope:                       | -   |
| No   |                                 |   |
| No   | Dimmable:                       | Yes   |
|      | GU10  MLS  No No                | directional:  GU10  MLS  Connected light source (CLS):  No  Envelope:  No |

| Product parameters   |        |                               |  |              |
|--|--------|-------------------------------|--|--------------|
| Parameter  |        | Value                         | Parameter  | Value        |
| General product parameters:  |        |                               |  |              |
| Energy consumption in on-<br>mode (kWh/1000 h), rounded<br>up to the nearest integer   |        | 5                             | Energy efficiency class  | E            |
| Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) |        | 475 in Nar-<br>row cone (90°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 6 500        |
| On-mode power (P <sub>on</sub> ), expressed in W   |        | 5,0                           | Standby power (P <sub>sb</sub> ),<br>expressed in W and<br>rounded to the sec-<br>ond decimal  | 0,00         |
| Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal                                |        | -                             | Colour rendering in-<br>dex, rounded to the<br>nearest integer, or<br>the range of CRI-val-<br>ues that can be set   | 80           |
| Outer dimen-   | Height | 54                            | Spectral power dis-  | See image    |
| sions without  | Width  | 50                            | tribution in the   | in last page |
| separate con-<br>trol gear, light-   | Depth  | 50                            | range 250 nm to 800<br>nm, at full-load  |              |

| ing control parts and non-lighting control parts, if any (millime-tre)  |              |  |                |  |
|---|--------------|--|----------------|--|
| Claim of equivalent power <sup>(a)</sup>  | Yes          | If yes, equivalent power (W)                                       | 60             |  |
|   |              | Chromaticity coordinates (x and y)                                 | 0,312<br>0,328 |  |
| Parameters for directional light  | sources:     |  |                |  |
| Peak luminous intensity (cd)  | 860          | Beam angle in degrees, or the range of beam angles that can be set | 36             |  |
| Parameters for LED and OLED lig   | tht sources: |  |                |  |
| R9 colour rendering index value   | 1            | Survival factor  | 1,00           |  |
| the lumen maintenance factor  | 0,97         |  |                |  |
| Parameters for LED and OLED mains light sources:  |              |  |                |  |
| displacement factor (cos φ1)  | 0,50         | Colour consistency in McAdam ellipses                              | 6              |  |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | _(b)         | If yes then replace-<br>ment claim (W)                             | -              |  |
| Flicker metric (Pst LM)   | 1,0          | Stroboscopic effect metric (SVM)                                   | 0,4            |  |

(a)'-': not applicable; (b)'-': not applicable;

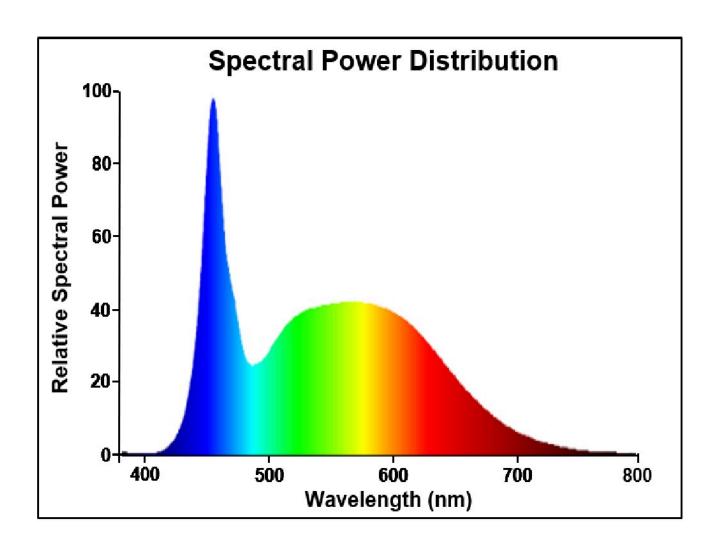

Model placed on the Union market from 08/07/2021



**EPREL registration number:** 543072 https://eprel.ec.europa.eu/qr/543072

Supplier: Feilo Sylvania International Group Kft. (Manufac Website: www.sylvania-lighting.com

turer)

**Customer care service:** 

Name: Product Compliance Website: www.sylvania-lighting.com

Email: product.compliance@sylvania-lighting.com Phone: +36 1 88 05 900

Address:

Feilo Sylvania International Group Kft. Duna Tower - Building B, 3rd Floor,

Népfürdö Street 22,

Budapest H-1138 Hungary