Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SYLVANIA

Supplier's address: Product Compliance, Feilo Sylvania International Group Kft. Duna Tower -

Building B, 3rd Floor, Népfürdö Street 22, Budapest H-1138 Hungary

B 4 I -	1		0000000
IVIORE	ii iaen	TITIOT:	0029193

т.,	nn	Λf	lial	n+	50	1111	٠.
ıу	hΕ	of	IIBI	Iι	30	uit	LC.


Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type	E14		
(or other electric interface)			
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

	Froduct parameters					
Parameter		Value	Parameter	Value		
General product parameters:						
<u> </u>	nption in on- 00 h), rounded st integer	5	Energy efficiency class	F		
Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		345 in Nar- row cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000		
On-mode power (P _{on}), ex- pressed in W		4,5	Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal	0,00		
Networked standby power (P _{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80		
Outer dimen-	Height	73	Spectral power dis-	See image		
sions without	Width	50	tribution in the	in last page		
separate con- trol gear, light-	Depth	50	range 250 nm to 800 nm, at full-load			

ing control parts and non-lighting control parts, if any (millimetre)					
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	50		
		Chromaticity coordinates (x and y)	0,434 0,403		
Parameters for directional light	sources:				
Peak luminous intensity (cd)	700	Beam angle in degrees, or the range of beam angles that can be set	36		
Parameters for LED and OLED li	ght sources:				
R9 colour rendering index value	1	Survival factor	1,00		
the lumen maintenance factor	0,94				
Parameters for LED and OLED mains light sources:					
displacement factor (cos φ1)	0,40	Colour consistency in McAdam ellipses	6		
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	_(b)	If yes then replace- ment claim (W)	-		
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4		

(a)'-': not applicable; (b)'-': not applicable;

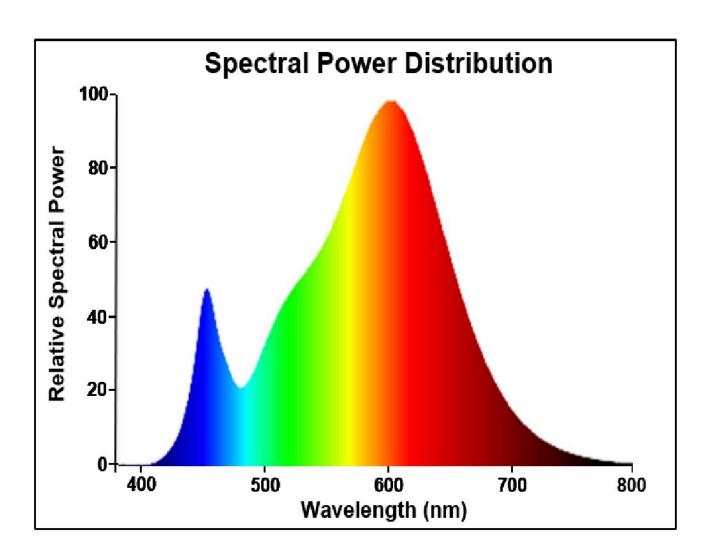

Model placed on the Union market from 20/07/2021



EPREL registration number: 543115 https://eprel.ec.europa.eu/qr/543115

Supplier: Feilo Sylvania International Group Kft. (Manufac Website: www.sylvania-lighting.com

turer)

Customer care service:

Name: Product Compliance Website: www.sylvania-lighting.com

Email: product.compliance@sylvania-lighting.com Phone: +36 1 88 05 900

Address:

Feilo Sylvania International Group Kft. Duna Tower - Building B, 3rd Floor,

Népfürdö Street 22,

Budapest H-1138 Hungary