## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SYLVANIA

Supplier's address: Product Compliance, Feilo Sylvania International Group Kft. Duna Tower -

Building B, 3rd Floor, Népfürdö Street 22, Budapest H-1138 Hungary

A 4 I -	l • .l • C•	0030346
IVIORE	l identifier:	111111111111111111111111111111111111111

т.,	nn	Λf	امزا	h+	50		co.
ıу	hΕ	UI	IIBI	IΙL	30	u	ce:


LED	Non-directional or directional:	DLS
GU5.3		
NMLS	Connected light source (CLS):	No
No	Envelope:	-
No		
No	Dimmable:	Yes
	GU5.3  NMLS  No  No	directional:  GU5.3  NMLS  Connected light source (CLS):  No  Envelope:  No

Product parameters					
Parameter		Value	Parameter	Value	
	General product parameters:				
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		5	Energy efficiency class	F	
Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		380 in Nar- row cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000	
On-mode power (P <sub>on</sub> ), expressed in W		4,4	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00	
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80	
Outer dimen-	Height	44	Spectral power dis-	See image	
sions without	Width	50	tribution in the	in last page	
separate control gear, light-	Depth	50	range 250 nm to 800 nm, at full-load		

ing control parts and non-lighting control trol parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	Yes	If yes, equivalent power (W)	35
		Chromaticity coordi-	0,382
		nates (x and y)	0,380
Parameters for directional light sources:			
Peak luminous intensity (cd)	900	Beam angle in degrees, or the range of beam angles that can be set	36
Parameters for LED and OLED light sources:			
R9 colour rendering index value	1	Survival factor	1,00
the lumen maintenance factor	0,97		

(a)<sub>'-'</sub>: not applicable;

(b)<sub>'-'</sub> : not applicable;

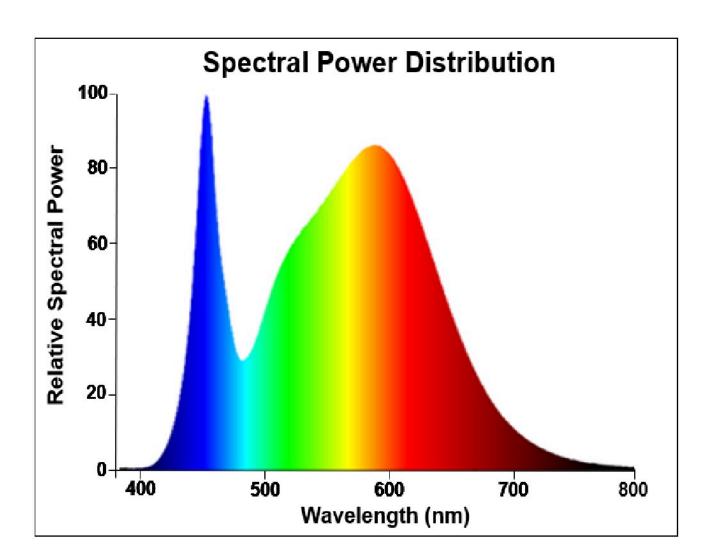

Model placed on the Union market from 20/07/2021



**EPREL registration number:** 543128 https://eprel.ec.europa.eu/qr/543128

Supplier: Feilo Sylvania International Group Kft. (Manufac Website: www.sylvania-lighting.com

turer)

**Customer care service:** 

Name: Product Compliance Website: www.sylvania-lighting.com

Email: product.compliance@sylvania-lighting.com Phone: +36 1 88 05 900

Address:

Feilo Sylvania International Group Kft. Duna Tower - Building B, 3rd Floor,

Népfürdö Street 22,

Budapest H-1138 Hungary