
## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light

| sources  | PELEGATED REGUL          | AHON (EU) 2019/2              | 2015 with regard to energ  | gy labelling of light     |  |  |
|--|--------------------------|-------------------------------|--|---------------------------|--|--|
| Supplier's name  | e or trade mark:         | LEDVANCE                      |  |                           |  |  |
| Supplier's address: LEDVANCE GmbH, Parkring 33, Garching, Germany  |                          |                               |  |                           |  |  |
| Model identifie  | r: AC34885               |                               |  |                           |  |  |
| Type of light so   | urce:                    |                               |  |                           |  |  |
| Lighting techno  | logy used:               | LED                           | Non-directional or directional:  | DLS                       |  |  |
| Light source cap-type (or other electric interface)  |                          | constant cur-<br>rent: 233 mA |  |                           |  |  |
| Mains or non-mains:  |                          | NMLS                          | Connected light source (CLS):  | No                        |  |  |
| Colour-tuneable light source:  |                          | No                            | Envelope:  | -                         |  |  |
| High luminance light source:   |                          | No                            |  |                           |  |  |
| Anti-glare shield:   |                          | No                            | Dimmable:  | No                        |  |  |
|  |                          | Product para                  |  | T -                       |  |  |
| Parameter  |                          | Value                         | Parameter  | Value                     |  |  |
|  |                          | General product               |  | Ι                         |  |  |
| Energy consumption in on-<br>mode (kWh/1000 h), rounded<br>up to the nearest integer   |                          | 48                            | Energy efficiency class  | F                         |  |  |
| Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) |                          | 4 200 in Wide<br>cone (120°)  | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 3 000                     |  |  |
| On-mode power (P <sub>on</sub> ), expressed in W   |                          | 48,0                          | Standby power (P <sub>sb</sub> ),<br>expressed in W and<br>rounded to the sec-<br>ond decimal  | 0,00                      |  |  |
| Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal                                |                          | -                             | Colour rendering in-<br>dex, rounded to the<br>nearest integer, or<br>the range of CRI-val-<br>ues that can be set   | 80                        |  |  |
| Outer dimensions without separate control gear, lighting control   | Height<br>Width<br>Depth | 161<br>117<br>8               | Spectral power distribution in the range 250 nm to 800 nm, at full-load  | See image<br>in last page |  |  |

| parts and non-<br>lighting con-<br>trol parts, if<br>any (millime-<br>tre) |       |  |       |  |  |  |
|--|-------|--|-------|--|--|--|
| Claim of equivalent power <sup>(a)</sup>                                   | -     | If yes, equivalent power (W)                                       | -     |  |  |  |
|  |       | Chromaticity coordi-   | 0,440 |  |  |  |
|  |       | nates (x and y)  | 0,403 |  |  |  |
| Parameters for directional light sources:                                  |       |  |       |  |  |  |
| Peak luminous intensity (cd)   | 1 950 | Beam angle in degrees, or the range of beam angles that can be set | 116   |  |  |  |
| Parameters for LED and OLED light sources:                                 |       |  |       |  |  |  |
| R9 colour rendering index value  | 0     | Survival factor  | 0,90  |  |  |  |
| the lumen maintenance factor   | 0,96  |  |       |  |  |  |

(a)'-': not applicable; (b)'-': not applicable;

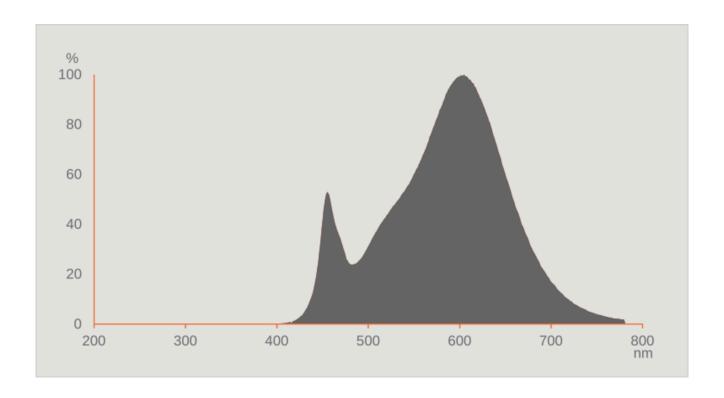

Model placed on the Union market from 16/09/2021



**EPREL registration number:** 583902 https://eprel.ec.europa.eu/qr/583902

Supplier: LEDVANCE GmbH (Manufacturer) Website: http://www.ledvance.com/

**Customer care service:** 

Name: LEDVANCE GmbH Website:

Email: contact@ledvance.com Phone: +49 89-780673-100

Address:

Parkring 33, Garching, Germany