

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** INNR

**Supplier's address:** Innr Servicedesk, Innr, IBRS 1232, 1200 WB, NL

**Model identifier:** RB 286 C

**Type of light source:**

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	Yes	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------


### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	9	Energy efficiency class	F
Useful luminous flux ( $\phi_{\text{use}}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	806 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	1800...6500
On-mode power ( $P_{\text{on}}$ ), expressed in W	8,5	Standby power ( $P_{\text{sb}}$ ), expressed in W and rounded to the second decimal	0,40
Networked standby power ( $P_{\text{net}}$ ) for CLS, expressed in W and rounded to the second decimal	0,40	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	83
Outer dimensions without separate control gear, light-	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		


ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power <sup>(a)</sup>	Yes	If yes, equivalent power (W)	60	
		Chromaticity coordinates (x and y)	0,461 0,409	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	11	Survival factor	1,00	
the lumen maintenance factor	0,99			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,82	Colour consistency in McAdam ellipses	3	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) '-': not applicable;

(b) '-': not applicable;

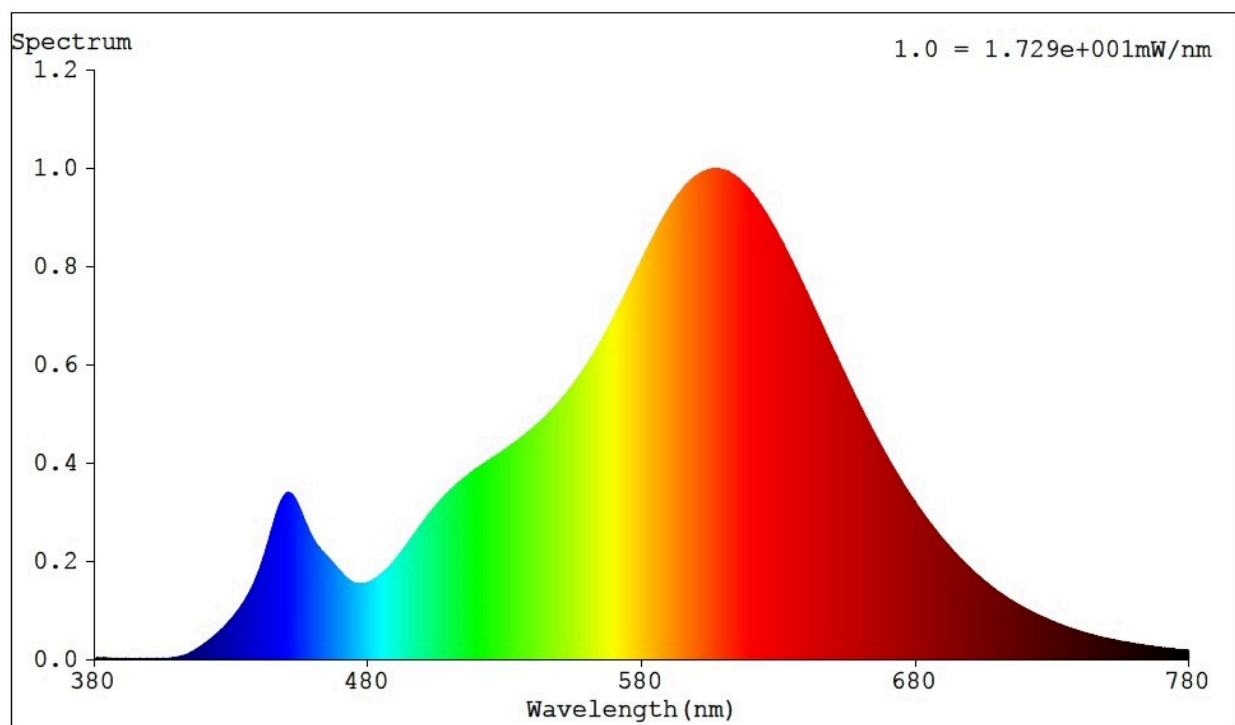

Model placed on the Union market from 31/08/2021



**EPREL registration number:** 694316

<https://eprel.ec.europa.eu/qr/694316>

**Supplier:** Innr Lighting B.V. (Manufacturer)

**Website:** [www.innr.com](http://www.innr.com)

**Customer care service:**

**Name:** Innr Servicedesk

**Website:** [www.innr.com](http://www.innr.com)

**Email:** [service@innr.com](mailto:service@innr.com)

**Phone:** +31357440388

**Address:**

Innr, IBRS 1232, 1200 WB, NL