

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LED Technology

Supplier's address: Quality manager, Piazza IV Novembre, 11, 20124 Milano MI, IT

Model identifier: LS27F7R125160FD

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------


General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	13	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 300 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	13,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without separate control gear, lighting control	Height	175	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	125	
	Depth	125	
			See image in last page


parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	190
		Chromaticity coordinates (x and y)	0,456 0,409
Parameters for directional light sources:			
Peak luminous intensity (cd)	414	Beam angle in degrees, or the range of beam angles that can be set	120
Parameters for LED and OLED light sources:			
R9 colour rendering index value	-2	Survival factor	0,90
the lumen maintenance factor	0,95		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,99	Colour consistency in McAdam ellipses	1
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3

(a) '-': not applicable;

(b) '-': not applicable;

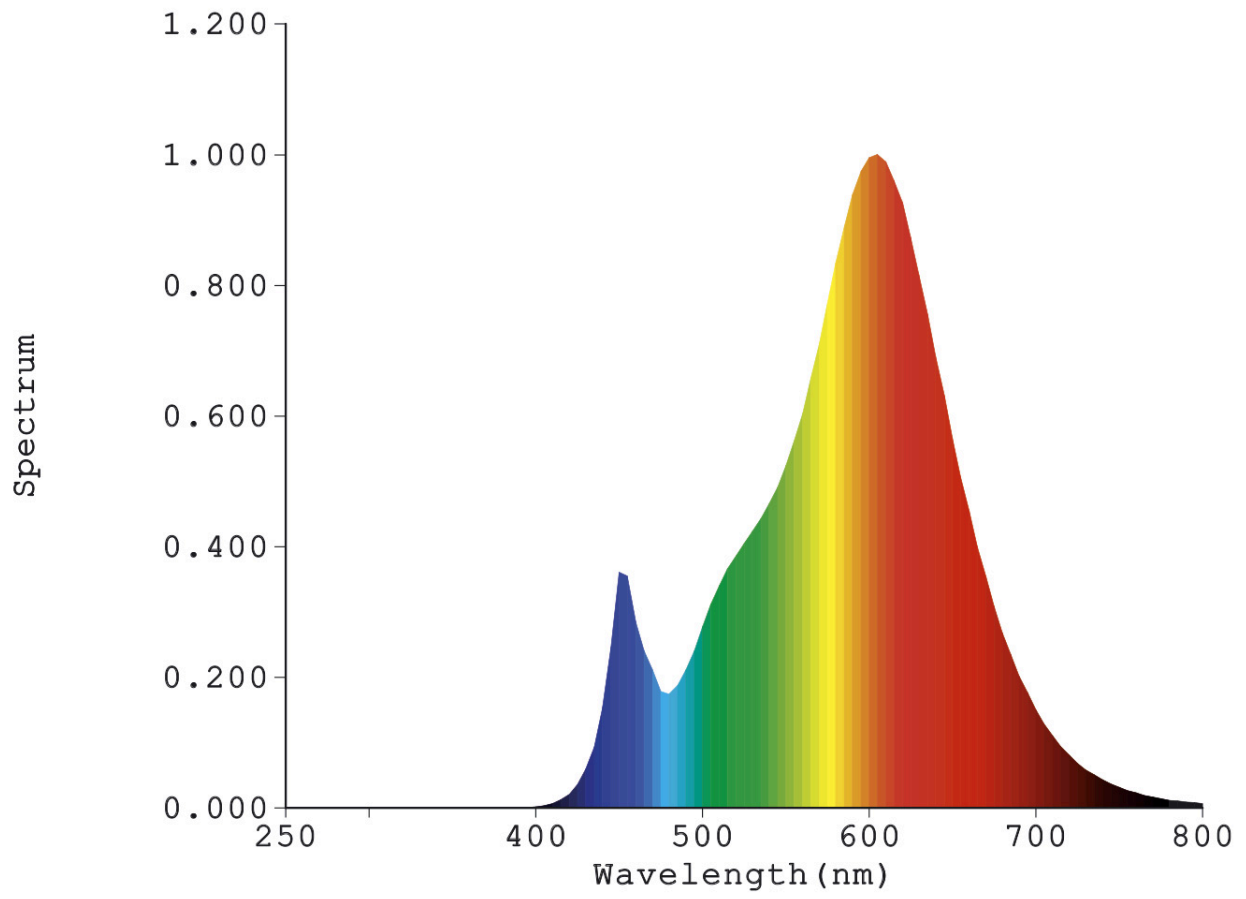

Model placed on the Union market from 01/09/2021.



EPREL registration number: 763047

<https://eprel.ec.europa.eu/qr/763047>

Supplier: Zerodue Industrial S.r.l. (Manufacturer)

Website: www.zerodueindustrial.com

Customer care service:

Name: Quality manager

Website: zerodueindustrial.com

Email: qc@zerodueindustrial.com

Phone: +390229526295

Address:

Piazza IV Novembre, 11
20124 Milano
Italy