

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ORION

Supplier's address: QC, Oberlaaerstraße 284, 1230 Wien, AT

Model identifier: LM S14s/15W LED (Linienl./1500lm/2700K)

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	S14s		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	15	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 500 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	15,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	1 000	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	30	
	Depth	30	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,460 0,415
Parameters for LED and OLED light sources:			
R9 colour rendering index value	13	Survival factor	1,00
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,98	Colour consistency in McAdam ellipses	3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4

(a)-: not applicable;

(b)-: not applicable;

Attachment 1: Photometric test record

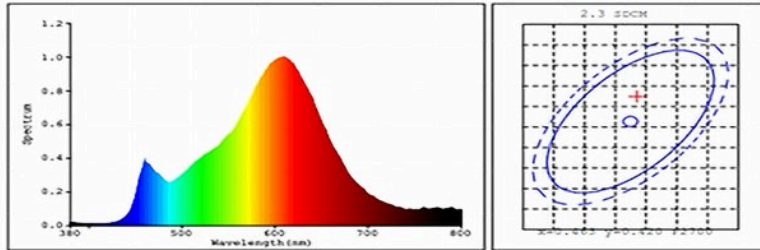

Color Parameters:

Chromaticity Coordinate: $x=0.4589$ $y=0.4149$
 Chromaticity Coordinate: $u^*=0.2600$ $v^*=0.5288$ ($duv=1.67e-03$)
 Tc=2747K Dominant WL:Ld=583.4nm Purity=62.3% Centroid WL:599.0nm
 Ratio:R=26.9% G=70.6% B=2.6% Peak WL:Lp=610.0nm HWL:115.1nm
 Render Index:Ra=83.7 CRI=79.5
 R1 -84 R2 -95 R3 -91 R4 -80 R5 -84 R6 -96 R7 -80
 R8 -59 R9 -13 R10-90 R11-80 R12-79 R13-87 R14-96 R15-75

Photo Parameters:

Flux: 1566.45 lm Φ_e : 4.3137 W Efficacy:106.85 lm/W

Electrical Parameters:

Luminaire: U=230.00V I=0.08404A P=14.66W PF=0.7584 4.9999


Test Report PPP 11118B: 2020 Rev.00

ID: 107082

Revision: 0 - released



Model placed on the Union market from 30/11/2021



EPREL registration number: 764966

<https://eprel.ec.europa.eu/qr/764966>

Supplier: Orion Leuchten-Fabrik Molecz & Sohn Gesellschaft m.b.H (Manufacturer)

Website: www.orionleuchten.at

Customer care service:

Name: QC

Website: www.orion.co.at

Email: a.yasar@orion.co.at

Phone: 0676842740866

Address:

Oberlaaerstraße 284
1230 Wien
Austria