

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ORION

Supplier's address: QC/LABOR, Oberlaaerstraße 284, 1230 Wien, AT

Model identifier: LM E14/4,5W klar (Illu/2700K/450lm)

Type of light source:

| | | | |
|---|-----|---------------------------------|------|
| Lighting technology used: | LED | Non-directional or directional: | NDLS |
| Light source cap-type (or other electric interface) | E14 | | |
| Mains or non-mains: | MLS | Connected light source (CLS): | No |
| Colour-tuneable light source: | No | Envelope: | - |
| High luminance light source: | No | | |
| Anti-glare shield: | No | Dimmable: | Yes |

Product parameters

| Parameter | Value | Parameter | Value |
|--|----------------------|--|---|
| General product parameters: | | | |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer | 5 | Energy efficiency class | F |
| Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 450 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2 700 |
| On-mode power (P_{on}), expressed in W | 4,5 | Standby power (P_{sb}), expressed in W and rounded to the second decimal | 0,00 |
| Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal | - | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set | 80 |
| Outer dimensions without separate control gear, lighting control | Height | 78 | Spectral power distribution in the range 250 nm to 800 nm, at full-load |
| | Width | 45 | |
| | Depth | 45 | |
| | | | See image in last page |

| | | | |
|---|------|---------------------------------------|----------------|
| parts and non-lighting control parts, if any (millimetre) | | | |
| Claim of equivalent power ^(a) | Yes | If yes, equivalent power (W) | 39 |
| | | Chromaticity coordinates (x and y) | 0,463 0,420 |
| Parameters for LED and OLED light sources: | | | |
| R9 colour rendering index value | 5 | Survival factor | 0,90 |
| the lumen maintenance factor | 0,94 | | |
| Parameters for LED and OLED mains light sources: | | | |
| displacement factor (cos ϕ_1) | 0,50 | Colour consistency in McAdam ellipses | 6 |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b) | If yes then replacement claim (W) | - |
| Flicker metric (Pst LM) | 1,0 | Stroboscopic effect metric (SVM) | 0,4 |

(a)-: not applicable;

(b)-: not applicable;

Table 5: Spectrum & Polar Plot of DIM-G45-E14-4.5W-Clear 2700K

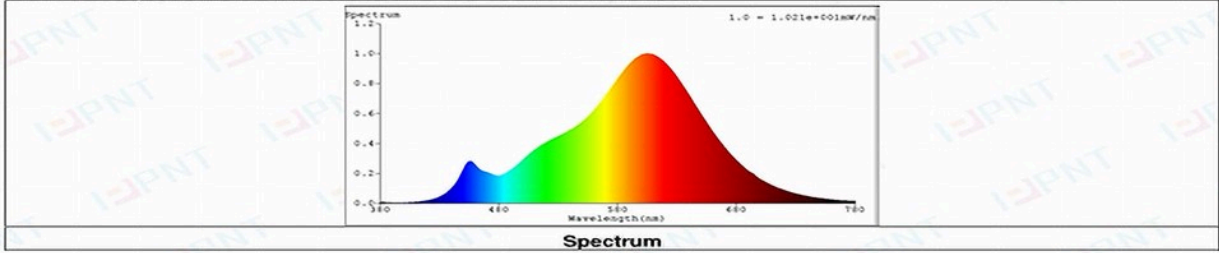


Table 5: Spectrum & Polar Plot of DIM-G45-E14-4.5W-Clear 3000K


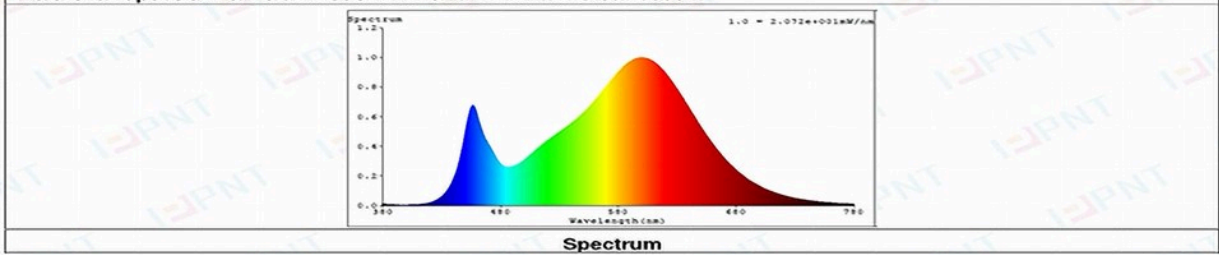


Table 5: Spectrum & Polar Plot of DIM-G45-E14-4.5W-Clear 4000K

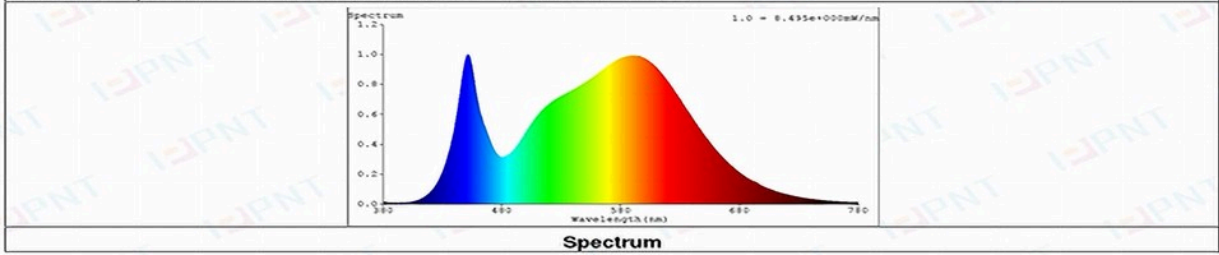


Pioneer Testing Technology
(Hangzhou) Co., Ltd
翰思检测技术(杭州)有限公司

Room 401, Building 41, No.536 Shunfeng Road,
Yuhang District, Hangzhou City 311199, Zhejiang
Province, China.

Tel: +86-13336138598
Email: pnt001@pnt-lab.com

Model placed on the Union market from 31/01/2022



EPREL registration number: 766928

<https://eprel.ec.europa.eu/qr/766928>

Supplier: Orion Leuchten-Fabrik Molecz & Sohn Gesellschaft m.b.H (Manufacturer)

Website: www.orionleuchten.at

Customer care service:

Name: QC/LABOR

Website: www.orion.co.at

Email: a.yasar@orion.co.at

Phone: 0676842740866

Address:

Oberlaaerstraße 284
1230 Wien
Austria