
Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

sources							
Supplier's name or trade mark: Muuto							
Supplier's address: Customer care, Østergade, Copenhagen, DK							
Model identifier: Tip Floor Lamp							
Type of light source:							
Lighting techno	logy used:	LED	Non-directional or directional:	DLS			
Light source cap-type		240V AC 50Hz					
(or other electri	c interface)						
Mains or non-mains:		MLS	Connected light source (CLS):	No			
Colour-tuneable light source:		No	Envelope:	-			
High luminance light source:		No					
Anti-glare shield:		No	Dimmable:	Yes			
Product parameters							
Parameter		Value	Parameter	Value			
General product parameters:							
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		11	Energy efficiency class	G			
Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		310 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700			
On-mode power (P _{on}), expressed in W		10,9	Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal	0,71			
Networked standby power (P _{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90			
Outer dimen-	Height	1 108	Spectral power dis-	See image			
sions without separate con- trol gear, light- ing control	Width Depth	320 200	tribution in the range 250 nm to 800 nm, at full-load	in last page			

parts and non- lighting con- trol parts, if any (millime- tre)							
Claim of equivalent power ^(a)		-	If yes, equivalent power (W)	-			
			Chromaticity coordinates (x and y)	0,453 0,409			
Parameters for directional light sources:							
Peak luminous intensity (cd)		121	Beam angle in degrees, or the range of beam angles that can be set	103			
Parameters for LED and OLED light sources:							
R9 colour rendering index value		62	Survival factor				
the lumen maintenance factor		-					
Parameters for LED and OLED mains light sources:							
displacement fa	ctor (cos φ1)	0,67	Colour consistency in McAdam ellipses	3			
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		_(b)	If yes then replace- ment claim (W)	-			
Flicker metric (Pst LM)		0,0	Stroboscopic effect metric (SVM)	0,0			

(a)_{'-'} : not applicable;

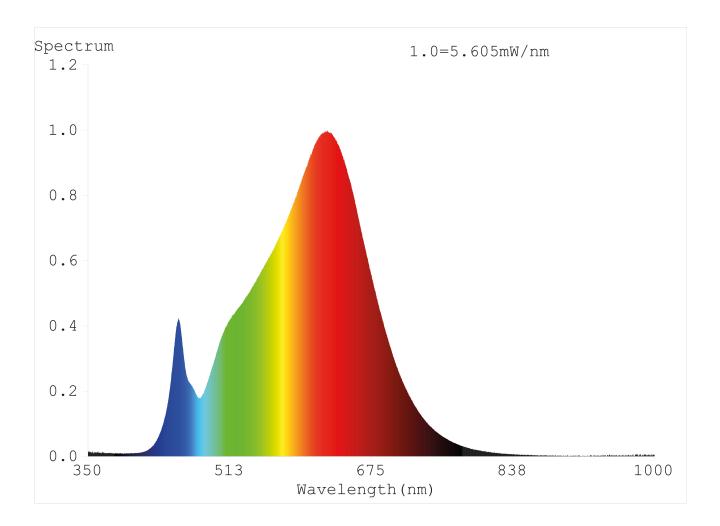

Model placed on the Union market from 01/07/2020



EPREL registration number: 796779 https://eprel.ec.europa.eu/qr/796779

Supplier: Muuto A/S (Manufacturer) **Website:**

Customer care service:

Name: Customer care Website:

Email: customercare@muuto.com Phone: +45 32 96 98 99

Address: Østergade Copenhagen Denmark