

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: GLOBO

Supplier's address: Switchboard, Gewerbestrasse 3 A-9184 Sankt Peter AUSTRIA, AT

Model identifier: 48405-50Q

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	Yes	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	50	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	6 000 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000 or 4 000 or 6 000
On-mode power (P_{on}), expressed in W	49,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,50
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control	Height	70	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	480	
	Depth	480	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,317 0,343
Parameters for LED and OLED light sources:			
R9 colour rendering index value	1	Survival factor	0,90
the lumen maintenance factor	0,95		

(a) : not applicable;

(b) : not applicable;


光电测试报告

产品型号 : 48405-50Q6000K 裸板
 产品编号 :
 生产厂家 :

操作人员 :
 测试设备 : SPEC-3000A Spectrometer
 测试时间 : 2021-6-29 10:14:23

CIE 色度参数

色品坐标: $x=0.3179$ $y=0.3435$ $u=0.1960$ $v=0.3178$ $u^*=0.1960$ $v^*=0.4767$
 相关色温: 6164 K ($duv=+0.00796$) 色容差: SDCM(IEC/F6500)=3.8 主波长: $\lambda_d=484.02$ nm 色纯度: 0.332
 峰值波长: $\lambda_p=448.3$ nm 质心波长: 541.3 nm 半宽度: $\Delta\lambda_p=25.2$ nm 色比: R=0.144 G=0.807 B=0.049
 显色指数: Ra=81.98 色彩逼真度指数: Rf=84.38 色彩饱和度指数: Rg=94.1 全色域指数 GAI=86.43
 R1=77.4 R2=84.6 R3=91.5 R4=85.9 R5=83.5 R6=82.2 R7=84.8 R8=65.4
 R9=-1.1 R10=65.3 R11=84.7 R12=63.3 R13=79.3 R14=96.0 R15=71.2

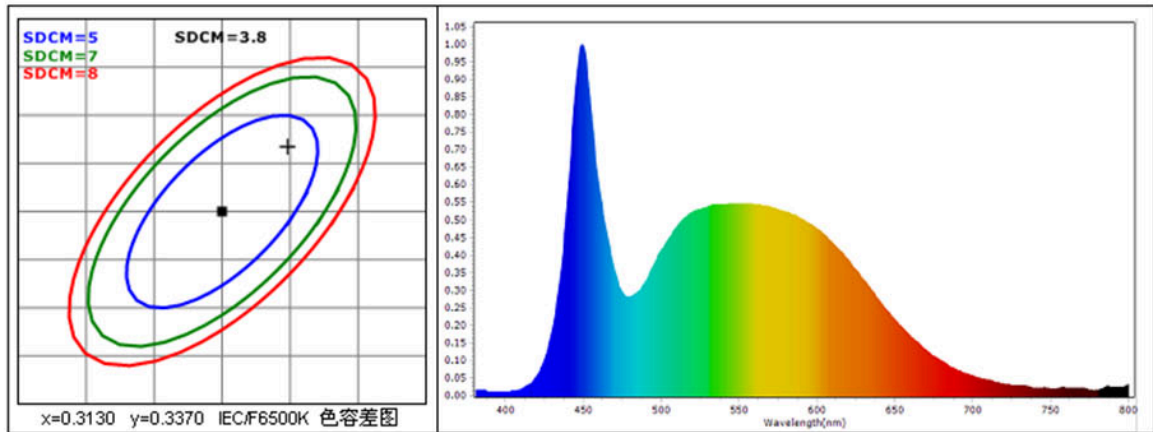

光度参数

光通量: 5996.92 lm 发光效率: 124.25 lm/w 辐射通量: 19.259 W
 能效指数(EEL): 0.110 能效等级: A++(most efficient) (EU 874/2012)

电参数

电压(V): 45.961 电流(A): 1.0501 功率(W): 48.264 功率因数: 1.0000


测试信息

环境温度 : Deg C 环境湿度 :
 测试范围 : 380-800nm : 1nm 峰值信号 : 46553 (71.0%)
 预热时间 : (分钟) 积分时间 : 126.03 (ms)

MEASUREFINE

本仪器由杭州慧谱仪器有限公司研制 <http://www.measurefine.com>

Model placed on the Union market from 05/06/2021



EPREL registration number: 851442

<https://eprel.ec.europa.eu/qr/851442>

Supplier: Globo Handels GmbH (Importer)

Website:

Customer care service:

Name: Switchboard

Website:

Email: office@globo-lighting.com

Phone: 0043 4253 32050

Address:

Gewerbestrasse 3 A-9184 Sankt Peter AUSTRIA
Austria