

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** &Tradition

**Supplier's address:** &Tradition Sales Support, Kronprinsesse gade 4, 1306 Copenhagen Denmark, DK

**Model identifier:** Journey SHY1 LED

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	N/A		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers


## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	5	Energy efficiency class	G
Useful luminous flux ( $\phi_{\text{use}}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	395 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2000...3000
On-mode power ( $P_{\text{on}}$ ), expressed in W	5,3	Standby power ( $P_{\text{sb}}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{\text{net}}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate con-	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		


trol gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-		If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,462 0,409
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	40		Survival factor	0,90
the lumen maintenance factor	0,95			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,94		Colour consistency in McAdam ellipses	3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	_(b)		If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0		Stroboscopic effect metric (SVM)	0,0

(a) : not applicable;

(b) : not applicable;

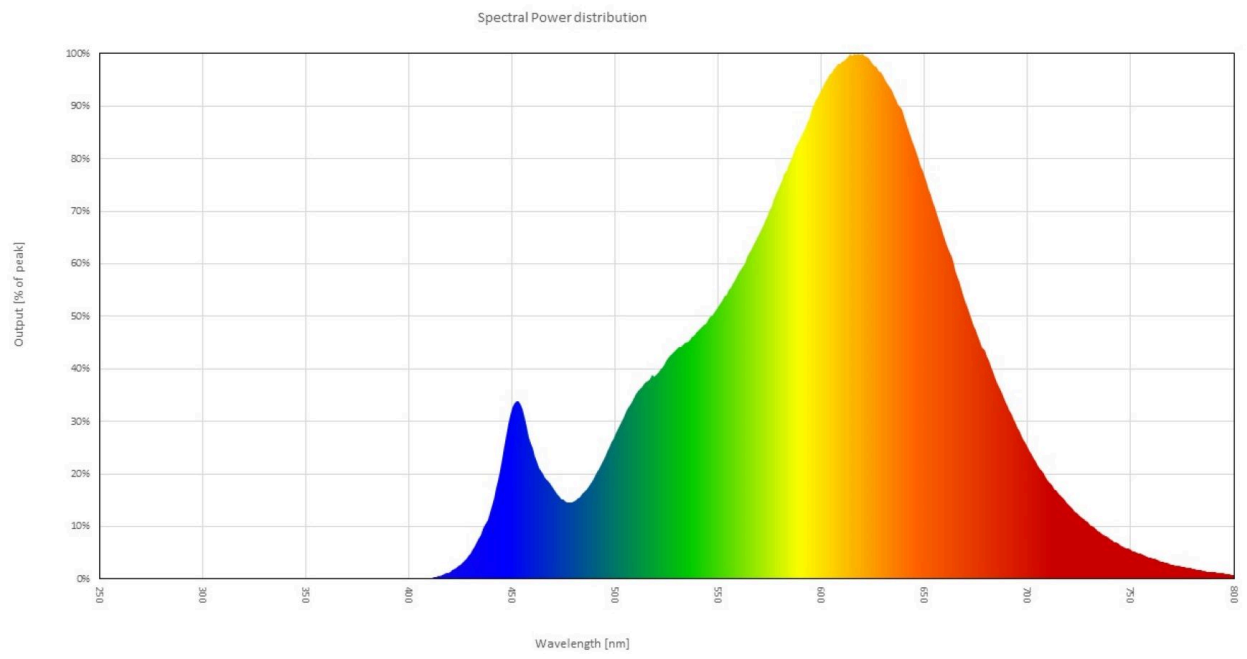

Model placed on the Union market from 01/09/2021



**EPREL registration number:** 852219

<https://eprel.ec.europa.eu/qr/852219>

**Supplier:** &Tradition A/S (Manufacturer)

**Website:**

**Customer care service:**

**Name:** &Tradition Sales Support

**Website:** <https://www.andtradition.com/>

**Email:** [info@andtradition.com](mailto:info@andtradition.com)

**Phone:** +45 39200233

**Address:**

Kronprinsesse gade 4  
1306 Copenhagen  
Denmark