

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Lucide

**Supplier's address:** Lucide NV, Bisschoppenhoflaan 145, 2100 Deurne, BE

**Model identifier:** 12200-90-30

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED wall lamp		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	10	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	415 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power ( $P_{on}$ ), expressed in W	10,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	220	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	900	
	Depth	40	
			See image in last page


parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,469 0,422
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	490	Beam angle in degrees, or the range of beam angles that can be set	53
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	7	Survival factor	0,90
the lumen maintenance factor	0,97		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,50	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,9	Stroboscopic effect metric (SVM)	0,4

(a) '-': not applicable;


(b) '-': not applicable;

Spectrum

1.0 = 1.994e+001mW/nm

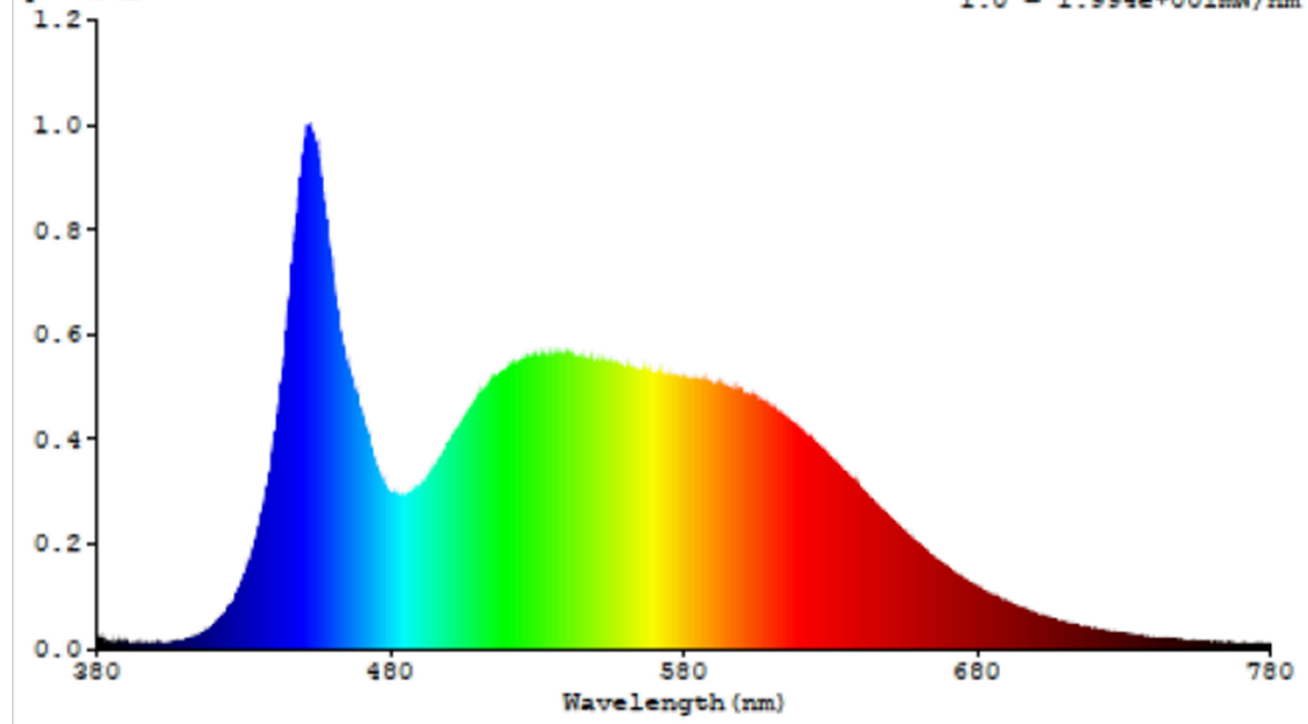

Model placed on the Union market from 20/05/2020



**EPREL registration number:** 866711

<https://eprel.ec.europa.eu/qr/866711>

**Supplier:** Lucide (Manufacturer)

**Website:** [www.lucide.be](http://www.lucide.be)

**Customer care service:**

**Name:** Lucide NV

**Website:**

**Email:** [info@lucide.com](mailto:info@lucide.com)

**Phone:** +32 3 366 22 04

**Address:**

Bisschoppenhoflaan 145  
2100 Deurne  
Belgium