## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Astro Lighting Ltd

Supplier's address: Technical Enquiries, Astro Lighting Ltd, River Way, CM20 2GJ Harlow Essex, UK

Model identifier: Forge Europa FEM-1795-5000-827 (per m) 2700K 12V

_	•			
IVna	Λt	light	source	٠.
IVDC	vı	HEILL	Jource	- •


Lighting technology used:	LED	Non-directional or directional:	DLS	
Light source cap-type	Solder Pads			
(or other electric interface)				
Mains or non-mains:	NMLS	Connected light source (CLS):	No	
Colour-tuneable light source:	No	Envelope:	-	
High luminance light source:	No			
Anti-glare shield:	No	Dimmable:	Yes	
Product parameters				

Product parameters						
Parameter		Value	Parameter	Value		
General product parameters:						
<u> </u>	mption in on- 00 h), rounded st integer	14	Energy efficiency class	F		
dicating if it refe a sphere (360º)	s flux (фuse), ineers to the flux in, in a wide cone arrow cone (90º)	1 400 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700		
On-mode pow pressed in W	ver (P <sub>on</sub> ), ex-	14,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00		
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80		
Outer dimen-	Height	1 000	Spectral power dis-	See image		
sions without	Width	10	tribution in the	in last page		
separate con- trol gear, light- ing control	Depth	3	range 250 nm to 800 nm, at full-load			

parts and non- lighting con- trol parts, if any (millime- tre)				
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-	
		Chromaticity coordi-	0,453	
		nates (x and y)	0,405	
Parameters for directional light sources:				
Peak luminous intensity (cd)	446	Beam angle in degrees, or the range of beam angles that can be set	120	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	5	Survival factor	0,99	
the lumen maintenance factor	0,98			

(a)'-': not applicable; (b)'-': not applicable;

## **Relative Power Distribution**

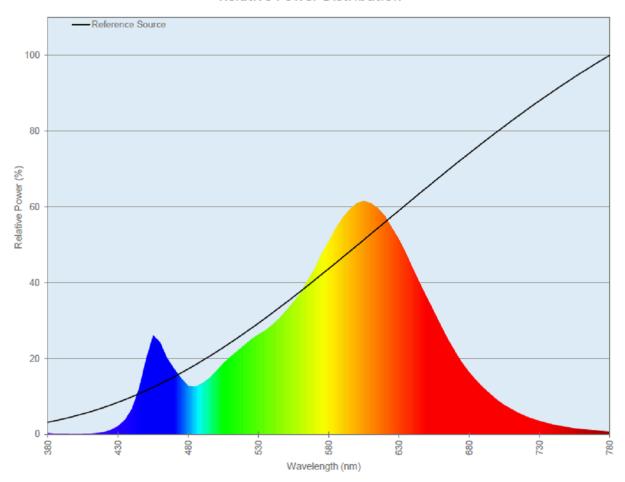

Model placed on the Union market from 01/09/2021



**EPREL registration number:** 877731 https://eprel.ec.europa.eu/qr/877731

Supplier: Astro Lighting (Europe) b.v. (Importer) Website: www.astrolighting.com

**Customer care service:** 

Name: Technical Enquiries Website: www.astrolighting.com

Email: technical@astrolighting.com Phone: +44 (0)1279 427001

Address:

Astro Lighting Ltd, River Way

CM20 2GJ Harlow United Kingdom