

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Astro Lighting Ltd

Supplier's address: Technical Enquiries, Astro Lighting Ltd, River Way, CM20 2GJ Harlow Essex, UK

Model identifier: Forge Europa FEM-1795-5000-827 (per m) 2700K 12V

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Solder Pads		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	14	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 400 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	14,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	1 000	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	10	
	Depth	3	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,453 0,405
Parameters for directional light sources:			
Peak luminous intensity (cd)	446	Beam angle in degrees, or the range of beam angles that can be set	120
Parameters for LED and OLED light sources:			
R9 colour rendering index value	5	Survival factor	0,99
the lumen maintenance factor	0,98		


(a) : not applicable;

(b) : not applicable;

Relative Power Distribution

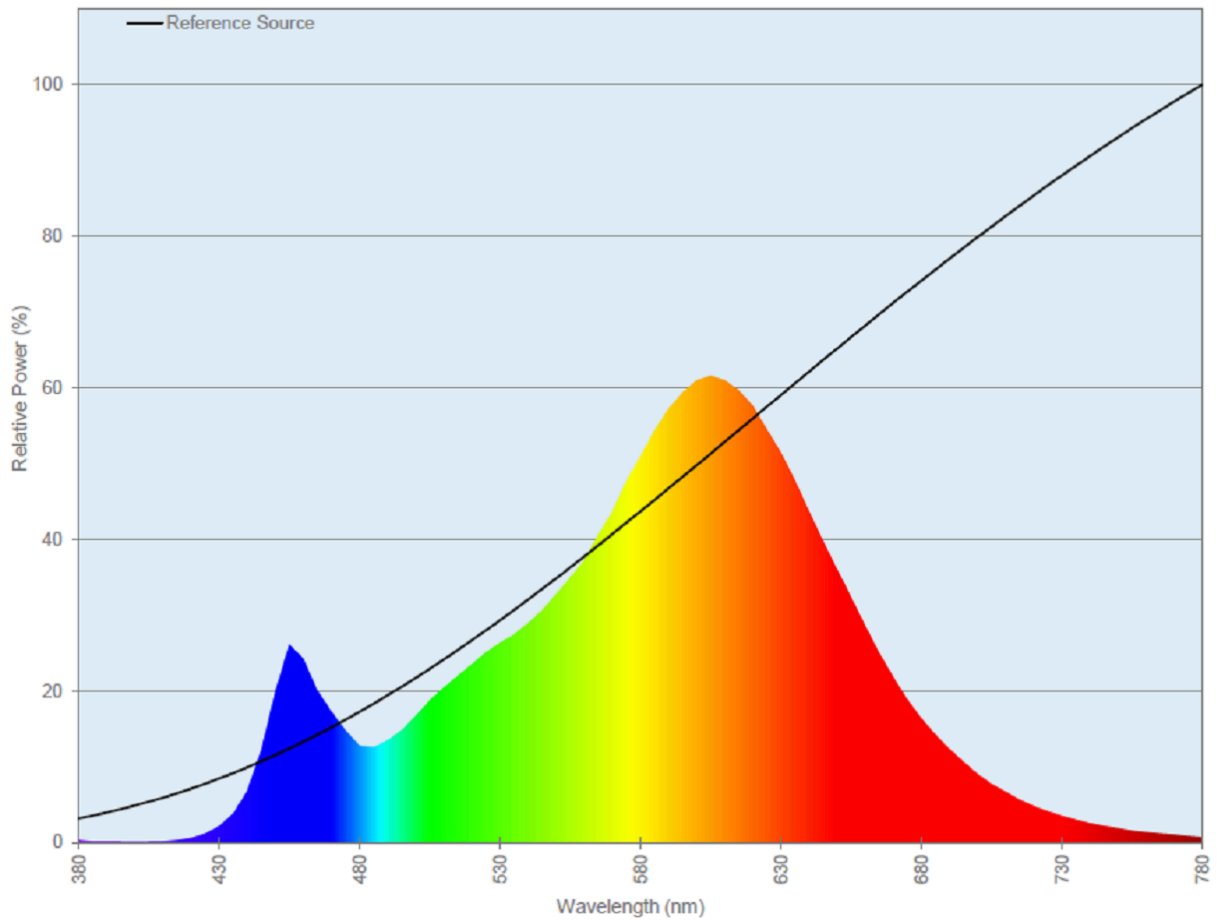

Model placed on the Union market from 01/09/2021



EPREL registration number: 877731

<https://eprel.ec.europa.eu/qr/877731>

Supplier: Astro Lighting (Europe) b.v. (Importer)

Website: www.astrolighting.com

Customer care service:

Name: Technical Enquiries

Website: www.astrolighting.com

Email: technical@astrolighting.com

Phone: +44 (0)1279 427001

Address:

Astro Lighting Ltd, River Way
CM20 2GJ Harlow
United Kingdom