

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Scandinavian Lighting Concept

Supplier's address: The Light Group, Sagmyra 2a, 4624 Kristiansand, NO

Model identifier: SLC1245

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	N/A		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	17	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	703 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 792
On-mode power (P_{on}), expressed in W	7,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	97
Outer dimensions without separate control gear, lighting control	Height	16	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	16	
	Depth	2	
			See image in last page


parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,455 0,414
Parameters for directional light sources:			
Peak luminous intensity (cd)	240	Beam angle in degrees, or the range of beam angles that can be set	116
Parameters for LED and OLED light sources:			
R9 colour rendering index value	88	Survival factor	0,96
the lumen maintenance factor	1,00		

(a) : not applicable;

(b) : not applicable;

CREE-CXA1507-4-011213-3719005-2700K-200mA

Spectrum

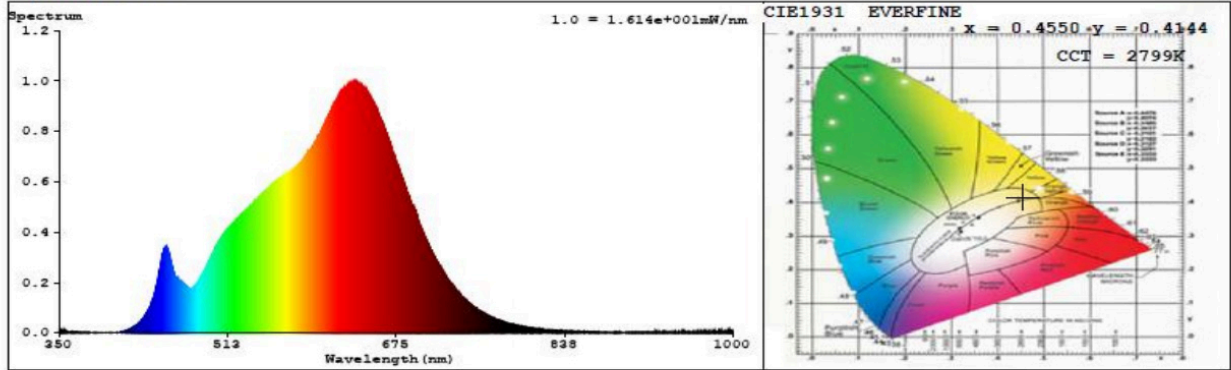

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4550$ $y = 0.4144$ / $u' = 0.2577$ $v' = 0.5281$ ($duv=1.86e-03$)

CCT= 2799K Prcp WL: $L_d=583.1nm$ Purity=61.0%

Peak WL: $L_p=635nm$ FWHM: $=157.7nm$ Ratio:R=26.2% G=71.2% B=2.6%


Render Index: $R_a = 97.8$ TM30:Rf=96 Rg=100

R1 =99 R2 =98 R3 =96 R4 =99 R5 =98 R6 =98 R7 =99

R8 =96 R9 =88 R10=94 R11=98 R12=87 R13=99 R14=97 R15=97

CQS Parameters: $Q_a = 97.3$

Model placed on the Union market from 01/08/2021



EPREL registration number: 881077

<https://eprel.ec.europa.eu/qr/881077>

Supplier: THE LIGHT GROUP AS (Manufacturer)

Website: www.tlg.no

Customer care service:

Name: The Light Group

Website: www.tlg.no

Email: post@tlg.no

Phone: +4738002101

Address:

Sagmyra 2a
4624 Kristiansand
Norway