## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trace	<b>de mark:</b> Vibia
--------------------------	-----------------------

Supplier's address: Vibia Lighting, progres 4-6, 08850 Gava gava Barcelona, ES

Model identifier: 370218/1B

(120º) or in a narrow cone (90º)

Type of light source:	Type	of light	source:
-----------------------	------	----------	---------

Type of light source:				
Lighting technology used:	LED	Non-directional or directional:	NDLS	
Light source cap-type	Renobable PCB			
(or other electric interface)				
Mains or non-mains:	NMLS	Connected light source (CLS):	No	
Colour-tuneable light source:	No	Envelope:	-	
High luminance light source:	No			
Anti-glare shield:	No	Dimmable:	Yes	
Product parameters				
Parameter	Value	Parameter	Value	
General product parameters:				
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer	10	Energy efficiency class	G	

up to the nearest integer			
Useful luminous flux (фuse), in-	868 in Wide	Correlated	colour
dicating if it refers to the flux in	cone (120°)	temperature	2,
a sphere (360º), in a wide cone		rounded to t	he near-

range of correlat-
ed colour temper-
atures, rounded to
the nearest 100 K,

		that can be set	
On-mode power (P <sub>on</sub> ), expressed in W	10,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,10
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val-	90


est 100 K, or the

			ues that can be set	
Outer dimen-	Height	850	Spectral power dis-	See image
sions without		250	tribution in the	in last page
separate con- trol gear, light- ing control	Depth	220	range 250 nm to 800 nm, at full-load	

2 700

parts and non- lighting con- trol parts, if any (millime- tre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordi-	0,455
		nates (x and y)	0,406
Parameters for LED and OLED light sources:			
R9 colour rendering index value	53	Survival factor	-
the lumen maintenance factor	-		

(a)'-': not applicable; (b)'-': not applicable;

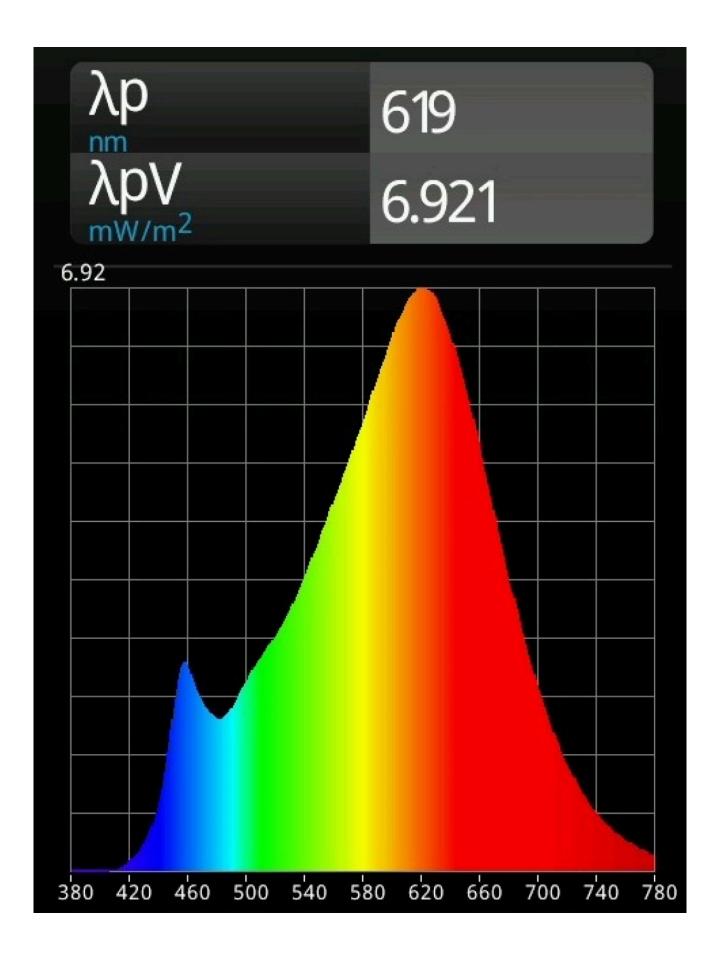

## Model placed on the Union market from 01/01/2010



**EPREL registration number:** 891589 https://eprel.ec.europa.eu/qr/891589

Supplier: Vibia Ligting, SLU (Manufacturer) Website: www.vibia.com

**Customer care service:** 

Name: Vibia Lighting Website: www.vibia.com

Email: vibia@vibialighting.com Phone: +34 934 796 970

Address: progres 4-6 08850 gava Spain