Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

| Supplier's | name | or trade | mark: | Vibia |
|------------|------|----------|-------|-------|
|------------|------|----------|-------|-------|

Supplier's address: Vibia Lighting, progres 4-6, 08850 Gava gava Barcelona, ES

Model identifier: 595010/15

| Type | of I | ight | sour | ce: |
|------|--------------|-------|------|-----|
| IVDC | U I I | ISIIL | JUUI | ··· |


ing

control

| Type of light so | urce: | | | |
|--|---|----------------------------|--|--------------|
| Lighting techno | logy used: | LED | Non-directional or directional: | NDLS |
| Light source cap | o-type | Renobable PCB | | |
| (or other electri | ic interface) | | | |
| Mains or non-m | nains: | NMLS | Connected light source (CLS): | No |
| Colour-tuneable | e light source: | No | Envelope: | - |
| High luminance | light source: | No | | |
| Anti-glare shield | d: | No | Dimmable: | Yes |
| | | Product para | meters | |
| Parameter | | Value | Parameter | Value |
| | | General product p | arameters: | |
| · · | nption in on- 00 h), rounded st integer | 7 | Energy efficiency class | F |
| dicating if it refe a sphere (360º) | s flux (фuse), ineers to the flux in, in a wide cone irrow cone (90º) | 683 in Wide cone (120°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2 700 |
| On-mode pow pressed in W | ver (P _{on}), ex- | 7,0 | Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal | 0,10 |
| (P _{net}) for CLS, (| tandby power expressed in W the second dec- | - | Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set | 90 |
| Outer dimen- | Height | 550 | Spectral power dis- | See image |
| sions without | Width | 350 | tribution in the | in last page |
| separate con- trol gear, light- | Depth | 430 | range 250 nm to 800 nm, at full-load | |

| parts and non- lighting con- trol parts, if any (millime- tre) | | | | |
|--|----|------------------------------|-------|--|
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - | |
| | | Chromaticity coordi- | 0,459 | |
| | | nates (x and y) | 0,408 | |
| Parameters for LED and OLED light sources: | | | | |
| R9 colour rendering index value | 56 | Survival factor | - | |
| the lumen maintenance factor | - | | | |

(a)'-': not applicable; (b)'-': not applicable;

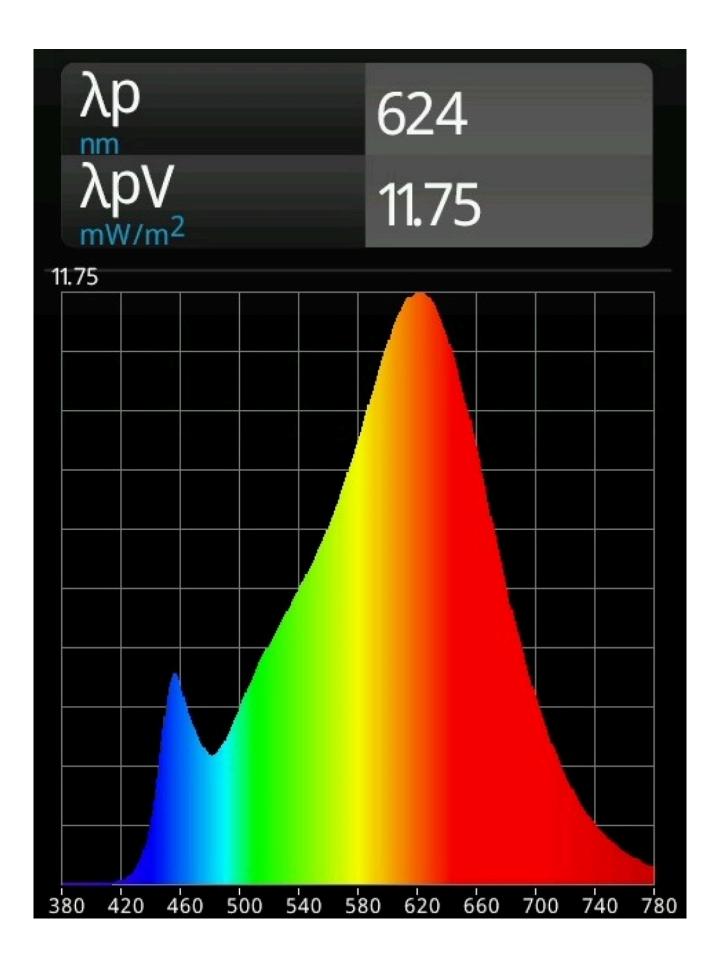

Model placed on the Union market from 01/01/2010



EPREL registration number: 905204 https://eprel.ec.europa.eu/qr/905204

Supplier: Vibia Ligting, SLU (Manufacturer) Website: www.vibia.com

Customer care service:

Name: Vibia Lighting Website: www.vibia.com

Email: vibia@vibialighting.com Phone: +34 934 796 970

Address: progres 4-6 08850 gava Spain