Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

| Supplier's name or trade mark: Molto Luce GmbH | | | | |
|--|----|--|--|--|
| upplier's address: Molto Luce Servicecenter, Europastraße 45 A-4600 We | ls | | | |

Model identifier: pcb0089,9030,1p


| Type | of I | ight | sour | ce: |
|------|--------------|-------|------|-----|
| IVDC | U I I | ISIIL | JUUI | ··· |

| 7,600 | | | |
|-------------------------------|------------|---------------------------------|-------|
| Lighting technology used: | LED | Non-directional or directional: | NDLS |
| Light source cap-type | Cable | | |
| (or other electric interface) | | | |
| Mains or non-mains: | NMLS | Connected light source (CLS): | No |
| Colour-tuneable light source: | No | Envelope: | - |
| High luminance light source: | Yes | | |
| Anti-glare shield: | No | Dimmable: | Yes |
| | Product pa | arameters | |
| Darameter | Value | Darameter | Value |

| Froduct parameters | | | | |
|---|--|-------------------------|--|---------------------------|
| Parameter | | Value | Parameter | Value |
| General product parameters: | | | | |
| _ · | nption in on- 00 h), rounded st integer | 5 | Energy efficiency class | G |
| dicating if it refe a sphere (360º) | s flux (фuse), in- ers to the flux in , in a wide cone arrow cone (90º) | 368 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 3 000 |
| On-mode pow pressed in W | ver (P _{on}), ex- | 4,5 | Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal | 0,00 |
| (P _{net}) for CLS, 6 | candby power expressed in W the second dec- | - | Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set | 90 |
| Outer dimensions without | Height Width | 4 13 | Spectral power distribution in the | See image in last page |
| separate con- trol gear, light- ing control | Depth | 13 | range 250 nm to 800 nm, at full-load | |

| parts and non- lighting con- trol parts, if any (millime- tre) | | | | |
|--|------|------------------------------|-------|--|
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - | |
| | | Chromaticity coordi- | 0,434 | |
| | | nates (x and y) | 0,403 | |
| Parameters for LED and OLED light sources: | | | | |
| R9 colour rendering index value | 50 | Survival factor | 0,99 | |
| the lumen maintenance factor | 0,80 | | | |

(a)'-': not applicable; (b)'-': not applicable;

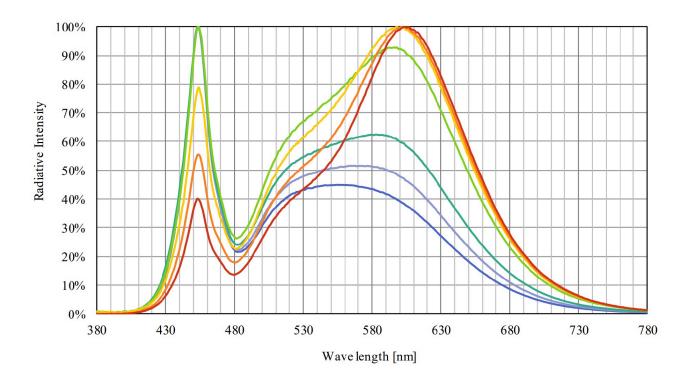

Model placed on the Union market from 05/03/2020



EPREL registration number: 910290 https://eprel.ec.europa.eu/qr/910290

Supplier: Molto Luce GmbH (Manufacturer) **Website:**

Customer care service:

Name: Molto Luce Servicecenter Website:

Email: servicecenter@moltoluce.com Phone: +43 7242 698-200

Address:

Europastraße 45 A-4600 Wels