

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ANTIDARK

**Supplier's address:** Antidark Aps, damgårdvej 2, 5500 Middelfart , DK

**Model identifier:** 2-215-27-2

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Yes


## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	12	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	818 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	1800...3000
On-mode power ( $P_{on}$ ), expressed in W	11,8	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, lighting control	Height	80	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	120	
	Depth	120	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,439 0,405
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	1 873	Beam angle in degrees, or the range of beam angles that can be set	113
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	68	Survival factor	1,00
the lumen maintenance factor	0,96		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	1,00	Colour consistency in McAdam ellipses	3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4

(a) '-': not applicable;

(b) '-': not applicable;

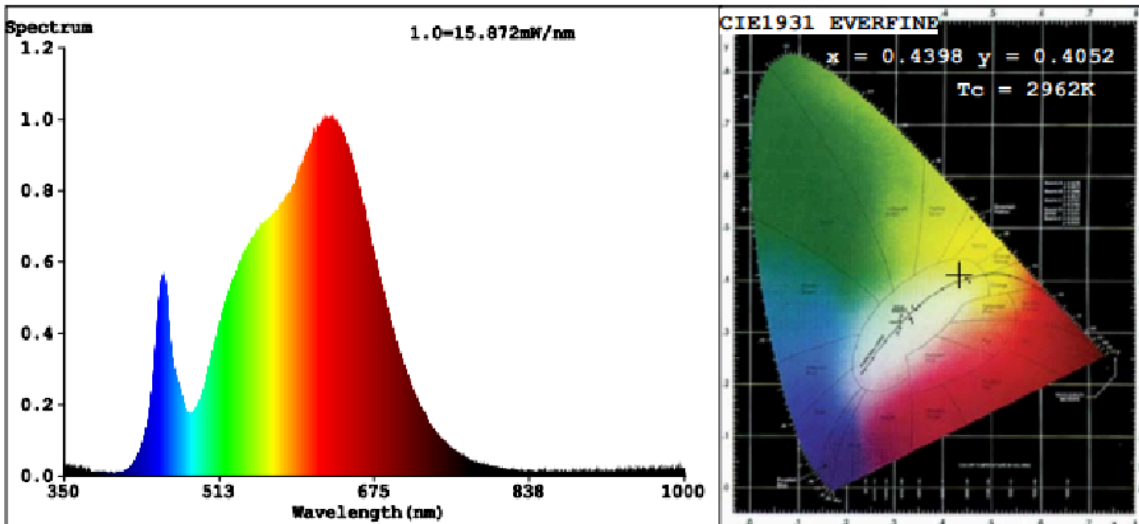

**Color Parameters:**

Chromaticity Coordinate:  $x=0.4398$   $y=0.4052$   $u'=0.2519$   $v'=0.5223$

$T_c=2962K$  (Duv=0.0001) Dominant WL:Ld =583.0nm Purity=53.6%

Red Ratio:R=26.0% Peak WL:Lp=626.9nm HWL:Lhd=163.3nm

Render Index:Ra=91.7

R1 =93    R2 =94    R3 =92    R4 =92    R5 =91    R6 =90    R7 =95  
 R8 =87    R9 =68    R10=82    R11=91    R12=71    R13=93    R14=94    R15=91

**Photo Parameters:**

Flux = 776.8 lm    Eff. : 65.52 lm/W    Fe = 2.764 W

**Electrical parameters:**

V = 33.88 V    I = 0.3499 A    P = 11.86 W PF = 1.000


LEVEL:OUT    WHITE:ANSI\_3000K

Status: Integral T = 56 ms    Ip = 53493 (82%)

Model:  
 Tester:Rioon  
 Temperature:25.3Deg  
 Manufactory:ANTIDARK

Number:2-215-27-1  
 Date:2021-11-13  
 Humidity:65.0%  
 Remarks:

Model placed on the Union market from 01/08/2019



**EPREL registration number:** 914604

<https://eprel.ec.europa.eu/qr/914604>

**Supplier:** Antidark Aps (Importer)

**Website:** [www.antidark.dk](http://www.antidark.dk)

**Customer care service:**

**Name:** Antidark Aps

**Website:**

**Email:** [tj@scanstudio.dk](mailto:tj@scanstudio.dk)

**Phone:** +4540187474

**Address:**

damgårdvej 2  
5500 Middelfart  
Denmark