

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ANTIDARK

**Supplier's address:** Antidark Aps, damgårdvej 2, 5500 Middelfart , DK

**Model identifier:** 2-216-01-2

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------


### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	7	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	595 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power ( $P_{on}$ ), expressed in W	6,5	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	120	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	120	
	Depth	80	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,457 0,411
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	226	Beam angle in degrees, or the range of beam angles that can be set	113
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	10	Survival factor	1,00
the lumen maintenance factor	0,96		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	1,00	Colour consistency in McAdam ellipses	3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	.. <sup>(b)</sup>	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4

(a)'.': not applicable;

(b)'.': not applicable;

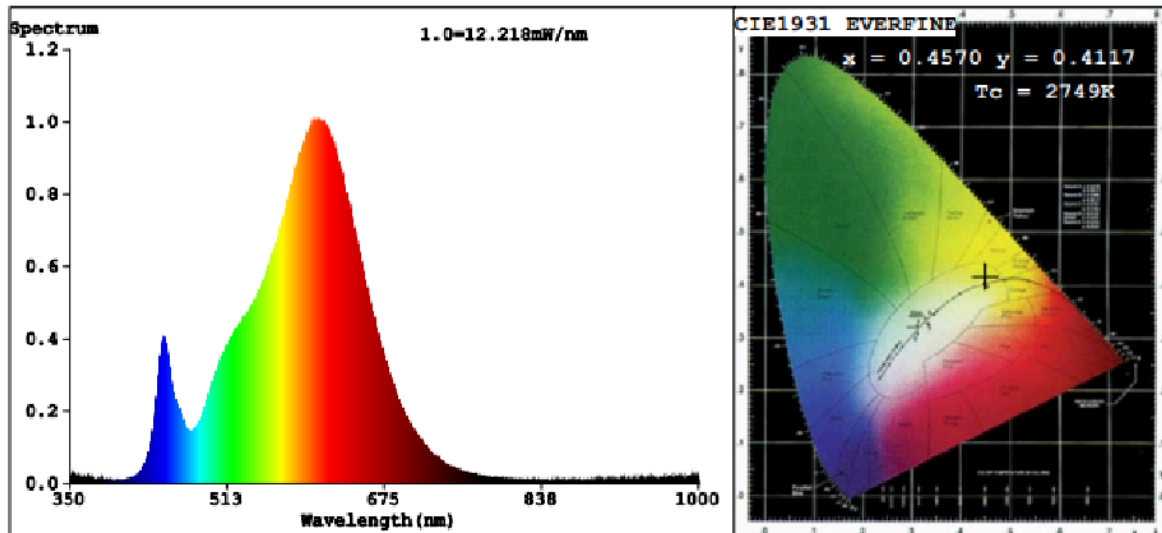

**Color Parameters:**

Chromaticity Coordinate:  $x=0.4570$   $y=0.4117$  /  $u'=0.2602$   $v'=0.5273$   
 $T_c=2749K$  (Duv=0.0006) Dominant WL:  $L_d = 583.8nm$  Purity=60.7%  
 Red Ratio:  $R=26.6\%$  Peak WL:  $L_p=612.5nm$  HWL:  $L_{hd}=118.6nm$   
 Render Index:  $R_a=83.2$   
 $R1 = 82$     $R2 = 91$     $R3 = 97$     $R4 = 82$     $R5 = 82$     $R6 = 90$     $R7 = 83$   
 $R8 = 59$     $R9 = 10$     $R10=80$     $R11=82$     $R12=76$     $R13=84$     $R14=99$     $R15=74$

**Photo Parameters:**


Flux = 562.5 lm   Eff. : 65.71 lm/W    $P_e = 1.754 W$

**Electrical parameters:**

$V = 12.23 V$     $I = 0.7002 A$     $P = 8.560 W$     $PF = 1.000$   
 LEVEL:OUT   WHITE:ANSI\_2700K

Status: Integral T = 65 ms    $I_p = 51101 (78\%)$

Model placed on the Union market from 04/11/2019



**EPREL registration number:** 915093

<https://eprel.ec.europa.eu/qr/915093>

**Supplier:** Antidark Aps (Importer)

**Website:** [www.antidark.dk](http://www.antidark.dk)

**Customer care service:**

**Name:** Antidark Aps

**Website:**

**Email:** [tj@scanstudio.dk](mailto:tj@scanstudio.dk)

**Phone:** +4540187474

**Address:**

damgårdvej 2  
5500 Middelfart  
Denmark