

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ANTIDARK

Supplier's address: Antidark Aps, damgårdvej 2, 5500 Middelfart , DK

Model identifier: 2-512-05-1

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Yes


Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	9	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	826 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	8,8	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, lighting control	Height	60	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	160	
	Depth	160	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,461 0,411
Parameters for directional light sources:			
Peak luminous intensity (cd)	299	Beam angle in degrees, or the range of beam angles that can be set	113
Parameters for LED and OLED light sources:			
R9 colour rendering index value	58	Survival factor	1,00
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	1,00	Colour consistency in McAdam ellipses	3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	1,0

(a) '-': not applicable;

(b) '-': not applicable;

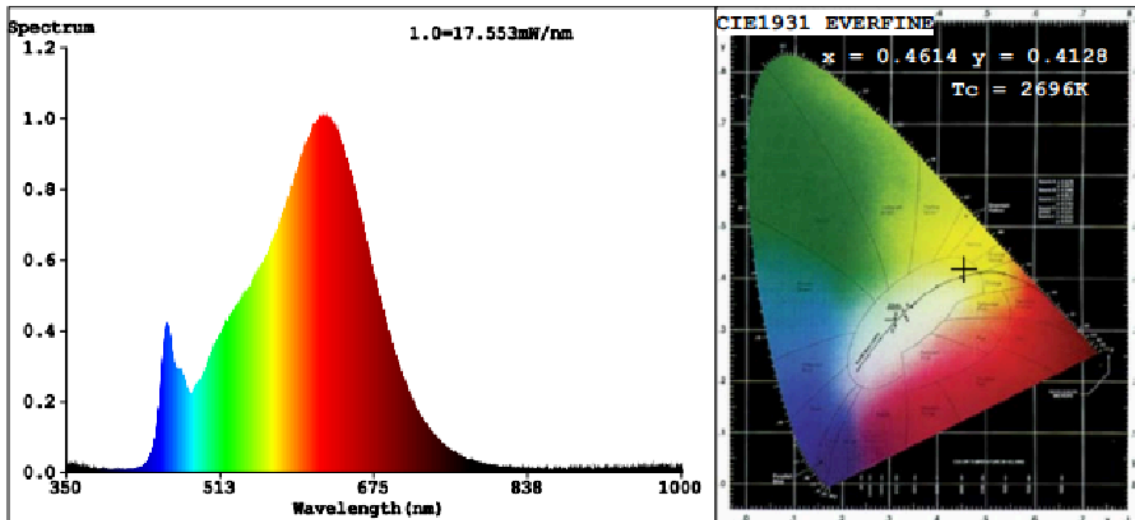

Color Parameters:

Chromaticity Coordinate: $x=0.4614$ $y=0.4128/u'=0.2625$ $v'=0.5284$

$T_c=2696K(Duv=0.0007)$ Dominant WL: $L_d = 584.0nm$ Purity= 62.4%

Red Ratio: $R=28.3\%$ Peak WL: $L_p=623.0nm$ HWL: $L_{hd}=139.4nm$

Render Index: $R_a=92.8$

R1 =94	R2 =99	R3 =97	R4 =92	R5 =94	R6 =97	R7 =90	
R8 =80	R9 =58	R10=96	R11=94	R12=82	R13=95	R14=99	R15=89

Photo Parameters:

Flux = 792.3 lm Eff. : 92.32 lm/W $F_e = 2.798 W$

Electrical parameters:

$V = 24.51 V$ $I = 0.3501 A$ $P = 8.582 W$ PF = 1.000


LEVEL:OUT WHITE:ANSI_2700K

Status: Integral $T = 51 ms$ $I_p = 55168 (848)$

Model:

Number:2-512-05-1

Model placed on the Union market from 04/11/2019



EPREL registration number: 915162

<https://eprel.ec.europa.eu/qr/915162>

Supplier: Antidark Aps (Importer)

Website: www.antidark.dk

Customer care service:

Name: Antidark Aps

Website:

Email: tj@scanstudio.dk

Phone: +4540187474

Address:

damgårdvej 2
5500 Middelfart
Denmark