Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

| Supplier's name or t | t rade mark: Vibia |
|----------------------|---------------------------|
|----------------------|---------------------------|

Supplier's address: Vibia Lighting, progres 4-6, 08850 Gava gava Barcelona, ES

Model identifier: 263221/23

| Type of light source: | Type | of light | source: |
|-----------------------|------|----------|---------|
|-----------------------|------|----------|---------|

sions without

separate con-

trol gear, light-

control

ing

Width

Depth

| Lighting techno | logy used: | LED | Non-directional or directional: | NDLS | | |
|---|---|------------------------------|--|-----------|--|--|
| Light source cap | o-type | Renobable PCB | | | | |
| (or other electri | ic interface) | | | | | |
| Mains or non-m | nains: | NMLS | Connected light source (CLS): | No | | |
| Colour-tuneable | e light source: | No | Envelope: | - | | |
| High luminance | light source: | No | | | | |
| Anti-glare shield | d: | No | Dimmable: | Yes | | |
| | | Product parar | neters | | | |
| Parameter | | Value | Parameter | Value | | |
| General product parameters: | | | | | | |
| Energy consur mode (kWh/10 up to the neare | 00 h), rounded | 15 | Energy efficiency class | D | | |
| dicating if it refo a sphere (360º) (120º) or in a na | s flux (фuse), ineers to the flux in, in a wide cone errow cone (90º) | 2 214 in Wide cone (120°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 3 000 | | |
| On-mode pow pressed in W | ver (P _{on}), ex- | 15,0 | Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal | 0,10 | | |
| | tandby power expressed in W the second dec- | - | Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set | 90 | | |
| Outer dimen- | Height | 240 | Spectral power dis- | See image | | |
| | | | | | | |

240

150

tribution in the


range 250 nm to 800

nm, at full-load

in last page

| parts and non- lighting con- trol parts, if any (millime- tre) | | | | | |
|--|----|------------------------------|-------|--|--|
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - | | |
| | | Chromaticity coordi- | 0,440 | | |
| | | nates (x and y) | 0,403 | | |
| Parameters for LED and OLED light sources: | | | | | |
| R9 colour rendering index value | 57 | Survival factor | - | | |
| the lumen maintenance factor | - | | | | |

(a)'-': not applicable; (b)'-': not applicable;

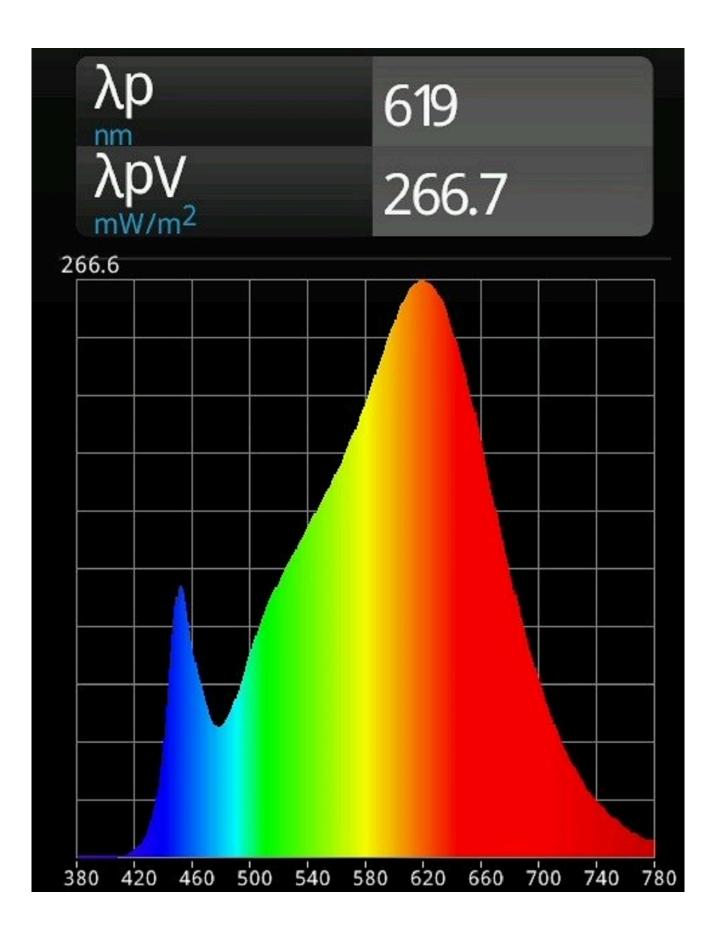

Model placed on the Union market from 01/01/2010



EPREL registration number: 938211 https://eprel.ec.europa.eu/qr/938211

Supplier: Vibia Ligting, SLU (Manufacturer) Website: www.vibia.com

Customer care service:

Name: Vibia Lighting Website: www.vibia.com

Email: vibia@vibialighting.com Phone: +34 934 796 970

Address: progres 4-6 08850 gava Spain