

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: GLOBO Handels GmbH

Supplier's address: switchboard, Gewerbestrasse 3 A-9184 St. Peter St. Jakob im Rosental/Kärnten, AT

Model identifier: 41562-24W

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	NA		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:


Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	24	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	2 700 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	24,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without separate control gear, light-	Height	25	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	420	
	Depth	420	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,430 0,400
Parameters for LED and OLED light sources:			
R9 colour rendering index value	15	Survival factor	0,90
the lumen maintenance factor	0,95		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,71	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4

(a): not applicable;

(b): not applicable;

Spectrum Test Report

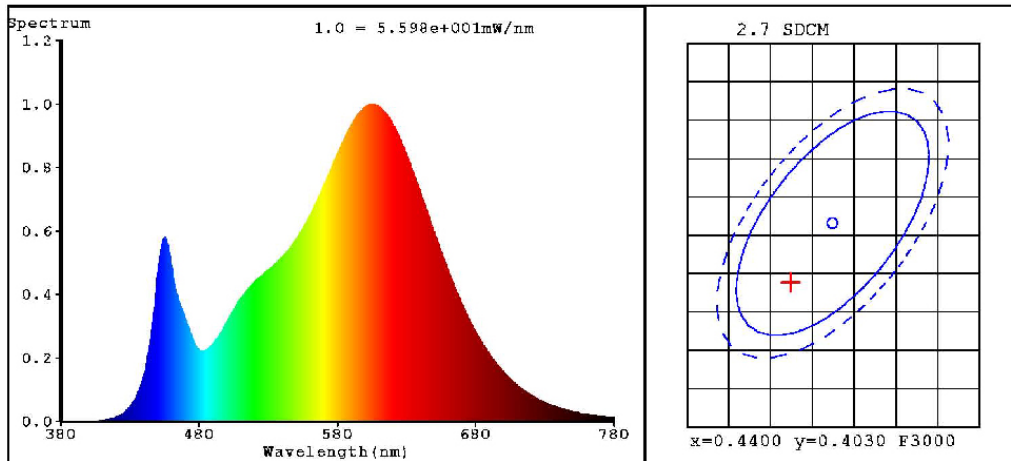

Colorimetric Parameters

Chromaticity Coordinate: $x=0.4356$ $y=0.3968$ / $u'=0.2529$ $v'=0.5183$
 CCT=2962K (Duv=-0.0028) Dominant WL:Ld =584.0nm Purity=49.8%
 Peak WL:Lp=605.0nm FWHM=123.0nm
 Render Index:Ra=84.1
 R1 =84 R2 =95 R3 =93 R4 =81 R5 =85 R6 =93 R7 =81
 R8 =60 R9 =15 R10=87 R11=81 R12=76 R13=87 R14=97 R15=77

Photometric & Radiometric Parameters

Flux = 2758 lm Eff. : 120.01 lm/W Fe = 8.583 W

Electrical parameters

V = 229.8 V I = 0.1840 A P = 22.99 W PF = 0.7436

LEVEL:OUT WHITE:ANSI_3000K


Status: Integral T = 55 ms Ip = 53283 (81%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:41562-24
 Tester:DAMIN
 Temperature:25.3Deg
 Manufacturer:LAC
 Assessor:damin

Number:1
 Date:2021-07-07 09:35:54
 Humidity:65.0%
 Remarks:

Model placed on the Union market from 30/09/2020



EPREL registration number: 940704

<https://eprel.ec.europa.eu/qr/940704>

Supplier: Globo Handels GmbH (Importer)

Website:

Customer care service:

Name: switchboard

Website:

Email: office@globo-lighting.com

Phone: 0043 4253 32050

Address:

Gewerbestrasse 3 A-9184 St. Peter St. Jakob im Rosental/Kärnten
Austria