Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

| Supplier's name or trade mark: Vibia | Suppli | er's na | ame or | · trade | mark: | Vibia |
|---|--------|---------|--------|---------|-------|-------|
|---|--------|---------|--------|---------|-------|-------|

Supplier's address: Vibia Lighting, progres 4-6, 08850 Gava gava Barcelona, ES

Model identifier: 169493/10

| T | - 6 | 10 - 1- 1 | |
|----------|------------|-----------|----------|
| IVno | α T | IIσnt | CULILCO. |
| IVDC | vı | IIGIIL | source: |

sions without

separate con-

trol gear, light-

control

ing

Width

Depth

| Lighting technology used: | | LED | Non-directional or directional: | NDLS | |
|---|--|----------------------------|--|-----------|--|
| Light source cap-type | | Renobable PCB | | | |
| (or other electric interface) | | | | | |
| Mains or non-mains: | | NMLS | Connected light source (CLS): | No | |
| Colour-tuneable light source: | | No | Envelope: | - | |
| High luminance light source: | | No | | | |
| Anti-glare shield: | | No | Dimmable: | No | |
| | | Product parar | neters | | |
| Parameter | | Value | Parameter | Value | |
| | General product parameters: | | | | |
| Energy consumption mode (kWh/1000 h), up to the nearest inte | rounded | 8 | Energy efficiency class | E | |
| Useful luminous flux (dicating if it refers to a sphere (360°), in a v (120°) or in a narrow of | the flux in wide cone cone (90º) | 970 in Wide cone (120°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2 700 | |
| On-mode power (P _{on}), expressed in W | | 8,0 | Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal | 0,10 | |
| Networked standby power (P _{net}) for CLS, expressed in W and rounded to the second decimal | | - | Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set | 90 | |
| Outer dimen- Heig | ht | 400 | Spectral power dis- | See image | |

700

60

tribution in the


range 250 nm to 800

nm, at full-load

in last page

| parts and non- lighting con- trol parts, if any (millime- tre) | | | | | |
|--|----|------------------------------|-------|--|--|
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - | | |
| | | Chromaticity coordi- | 0,458 | | |
| | | nates (x and y) | 0,413 | | |
| Parameters for LED and OLED light sources: | | | | | |
| R9 colour rendering index value | 46 | Survival factor | - | | |
| the lumen maintenance factor | - | | | | |

(a)'-': not applicable; (b)'-': not applicable;

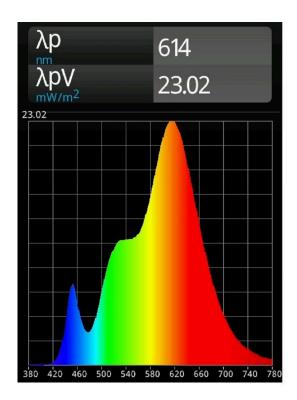

Model placed on the Union market from 01/01/2010



EPREL registration number: 950652 https://eprel.ec.europa.eu/qr/950652

Supplier: Vibia Ligting, SLU (Manufacturer) Website: www.vibia.com

Customer care service:

Name: Vibia Lighting Website: www.vibia.com

Email: vibia@vibialighting.com Phone: +34 934 796 970

Address: progres 4-6 08850 gava Spain