Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

| Supplier's name or trace | de mark: Vibia |
|--------------------------|-----------------------|
|--------------------------|-----------------------|

Supplier's address: Vibia Lighting, progres 4-6, 08850 Gava gava Barcelona, ES

Model identifier: 740293/15

| _ | • | | | |
|------|-----|--------|------|-----|
| Tyna | Ot. | lioht | sour | CD. |
| IVDC | O. | IIGIIL | 30ui | LC. |

sions without

separate con-

trol gear, light-

control

ing

Width

Depth

| Lighting technology used: | LED | Non-directional or directional: | NDLS | | | |
|--|--------------------|--|------------|--|--|--|
| Light source cap-type | Renobable PCB | | | | | |
| (or other electric interface) | | | | | | |
| Mains or non-mains: | NMLS | Connected light source (CLS): | No | | | |
| Colour-tuneable light source: | No | Envelope: | - | | | |
| High luminance light source: | No | | | | | |
| Anti-glare shield: | No | Dimmable: | Yes | | | |
| | Product parameters | | | | | |
| Parameter | Value | Parameter | Value | | | |
| General product parameters: | | | | | | |
| Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer Useful luminous flux (фuse), in- | | Energy efficiency class Correlated colour | F 2 700 | | | |
| dicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | cone (120°) | temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | | | | |
| On-mode power (P _{on}), expressed in W | 4,0 | Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal | 0,10 | | | |
| Networked standby power (P _{net}) for CLS, expressed in W and rounded to the second decimal | | Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set | 90 | | | |
| Outer dimen- Height | 260 | Spectral power dis- | See image | | | |

tribution

range 250 nm to 800

nm, at full-load

100


140

in the

in last page

| parts and non- lighting con- trol parts, if any (millime- tre) | | | | |
|--|----|------------------------------|-------|--|
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - | |
| | | Chromaticity coordi- | 0,458 | |
| | | nates (x and y) | 0,413 | |
| Parameters for LED and OLED light sources: | | | | |
| R9 colour rendering index value | 46 | Survival factor | - | |
| the lumen maintenance factor | - | | | |

(a)'-': not applicable; (b)'-': not applicable;

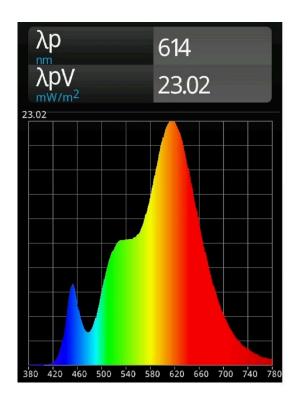

Model placed on the Union market from 01/01/2010



EPREL registration number: 952422 https://eprel.ec.europa.eu/qr/952422

Supplier: Vibia Ligting, SLU (Manufacturer) Website: www.vibia.com

Customer care service:

Name: Vibia Lighting Website: www.vibia.com

Email: vibia@vibialighting.com Phone: +34 934 796 970

Address: progres 4-6 08850 gava Spain