

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Ledino

Supplier's address: Zentrale, Spitzahornweg 1, 14974 Ludwigsfelde, DE

Model identifier: 11231006001022

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	offenes Kabelende		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:


Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	100	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	13 000 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	6 500
On-mode power (P_{on}), expressed in W	100,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	170	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	270	
	Depth	270	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,317 0,333
Parameters for directional light sources:			
Peak luminous intensity (cd)	4 673	Beam angle in degrees, or the range of beam angles that can be set	116
Parameters for LED and OLED light sources:			
R9 colour rendering index value	10	Survival factor	1,00
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,98	Colour consistency in McAdam ellipses	1
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	.. ^(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,0

(a)'.-' : not applicable;

(b)'.-' : not applicable;

Spectrum

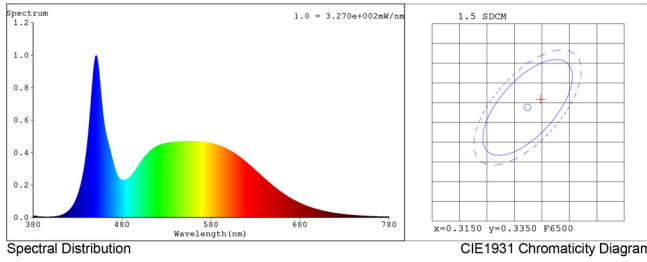

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.3171$ $y = 0.3366$ / $u' = 0.1980$ $v' = 0.4730$ ($duv=4.93e-03$)

CCT= 6230K Prcp W/L: $L_d=494.3nm$ Purity=5.3%

Peak W/L: $L_p=451nm$ FWHM: $=21.3nm$ Ratio:R=13.7% G=81.0% B=5.4%

Render Index: $R_a = 83.4$

R1 =81 R2 =87 R3 =91 R4 =83 R5 =82 R6 =83 R7 =89

R8 =71 R9 =10 R10=70 R11=83 R12=59 R13=83 R14=95 R15=77

Photometric & Radiometric Parameters

Flux = 9491.5 lm Eff.: 92.98 lm/W $F_e = 30.469 W$


Flux of emitted photons($\mu mol/s$):137.73 Fluo. and blue light ratio:2.711 Fluorescent eff.:215.8

Photons1:1.348e+002 $\mu mol/s(400\sim 700nm)$ Photons2:1.348e+002 $\mu mol/s(400\sim 700nm)$

Electrical parameters

V = 230.0 V I = 0.4485 A P = 102.1 W PF = 0.9896

Model placed on the Union market from 01/12/2021



EPREL registration number: 964161

<https://eprel.ec.europa.eu/qr/964161>

Supplier: Joachim Arendt (Importer)

Website:

Customer care service:

Name: Zentrale

Website: www.ledino.com

Email: info@ledino.com

Phone: +49 30 7673736 0

Address:

Spitzahornweg 1
14974 Ludwigsfelde
Germany