

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** PERFORMANCE IN LIGHTING

**Supplier's address:** PIL GmbH, Stapelner Str. 1/3, 38644 Goslar, DE

**Model identifier:** 112413599840001

## Type of light source:

|                                                     |                     |                                 |      |
|-----------------------------------------------------|---------------------|---------------------------------|------|
| Lighting technology used:                           | LED                 | Non-directional or directional: | NDLS |
| Light source cap-type (or other electric interface) | wires or connectors |                                 |      |
| Mains or non-mains:                                 | NMLS                | Connected light source (CLS):   | No   |
| Colour-tuneable light source:                       | No                  | Envelope:                       | -    |
| High luminance light source:                        | No                  |                                 |      |
| Anti-glare shield:                                  | No                  | Dimmable:                       | Yes  |


## Product parameters

| Parameter                                                                                                                                      | Value                | Parameter                                                                                                                                                  | Value                                                                   |
|------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| <b>General product parameters:</b>                                                                                                             |                      |                                                                                                                                                            |                                                                         |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer                                                                  | 2                    | Energy efficiency class                                                                                                                                    | D                                                                       |
| Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 185 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 4 000                                                                   |
| On-mode power ( $P_{on}$ ), expressed in W                                                                                                     | 1,2                  | Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal                                                                               | 0,00                                                                    |
| Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal                                                | -                    | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set                                                         | 80                                                                      |
| Outer dimensions without separate control gear, lighting control                                                                               | Height               | 6                                                                                                                                                          | Spectral power distribution in the range 250 nm to 800 nm, at full-load |
|                                                                                                                                                | Width                | 600                                                                                                                                                        |                                                                         |
|                                                                                                                                                | Depth                | 9                                                                                                                                                          |                                                                         |
|                                                                                                                                                |                      |                                                                                                                                                            | See image in last page                                                  |


|                                                           |      |                                    |                |
|-----------------------------------------------------------|------|------------------------------------|----------------|
| parts and non-lighting control parts, if any (millimetre) |      |                                    |                |
| Claim of equivalent power <sup>(a)</sup>                  | Yes  | If yes, equivalent power (W)       | 19             |
|                                                           |      | Chromaticity coordinates (x and y) | 0,385<br>0,380 |
| <b>Parameters for LED and OLED light sources:</b>         |      |                                    |                |
| R9 colour rendering index value                           | 19   | Survival factor                    | 1,00           |
| the lumen maintenance factor                              | 0,98 |                                    |                |

(a) : not applicable;

(b) : not applicable;

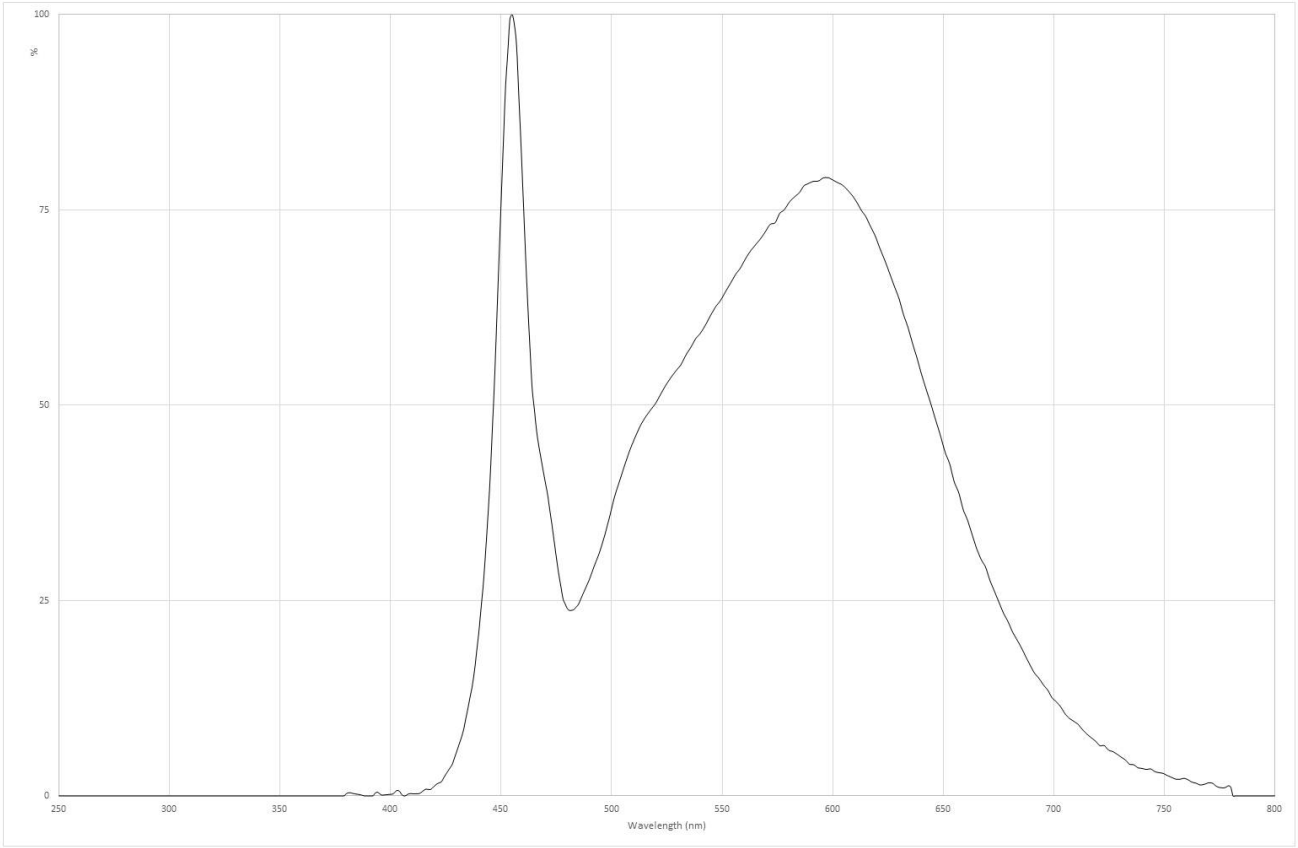

Model placed on the Union market from 24/09/2021



**EPREL registration number:** 980974

<https://eprel.ec.europa.eu/qr/980974>

**Supplier:** PERFORMANCE IN LIGHTING S.P.A. (Manufacturer)

**Website:** [www.performanceinlighting.com](http://www.performanceinlighting.com)

**Customer care service:**

**Name:** PIL GmbH

**Website:**

**Email:** [info.de@pil.lighting](mailto:info.de@pil.lighting)

**Phone:** +49 (0) 5321 3777 0

**Address:**

Stapelner Str. 1/3  
38644 Goslar  
Germany