

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** GUBI

**Supplier's address:** Héctor Mendoza, Orientkaj 18-20, 2150 Nordhavn, Denmark 18-20, 2150 Nordhavn Copenhagen, DK

**Model identifier:** 10083626-27-Unbound Table Lamp, H120

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	module		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

### General product parameters:


Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	18	Energy efficiency class	E
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	2 150 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power ( $P_{on}$ ), expressed in W	18,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, light-	Height	18	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	18	
	Depth	1 020	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,463 0,420
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	9	Beam angle in degrees, or the range of beam angles that can be set	120
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	1	Survival factor	0,90
the lumen maintenance factor	0,90		

(a) : not applicable;

(b) : not applicable;

## Spectrum Test Report

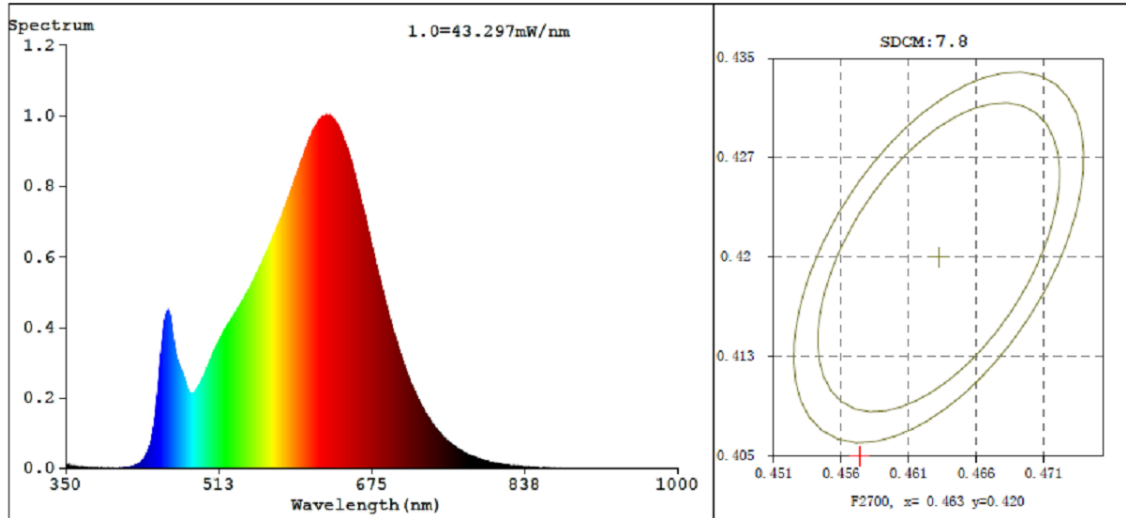**Color Parameters:**


Chromaticity Coordinate:  $x=0.4572$   $y=0.4024$  /  $u'=0.2644$   $v'=0.5238$

CCT=2674K (Duv=-0.0028) Dominant WL:Ld =585.3nm WL:Lc = --nm Purity=58.0%

Ratio:R=26.9% G=70.3% B=2.8% Peak WL:Lp=625.9nm FWHM=143.7nm

Render Index:Ra=93.4 AvgR=91.7

Model placed on the Union market from 01/10/2021



**EPREL registration number:** 995491

<https://eprel.ec.europa.eu/qr/995491>

**Supplier:** Gubi A/S (Manufacturer)

**Website:** [www.gubi.com](http://www.gubi.com)

**Customer care service:**

**Name:** Héctor Mendoza

**Website:** [www.gubi.dk](http://www.gubi.dk)

**Email:** [groupproductdevelopment@gubi.dk](mailto:groupproductdevelopment@gubi.dk)

**Phone:** +4533326368

**Address:**

Orientkaj 18-20, 2150 Nordhavn, Denmark 18-20

2150 Copenhagen

Denmark