Product Information Sheet

separate con-

trol gear, light-

Depth

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

sources			ora with regard to energ	5, 14.00		
Supplier's name	or trade mark:	LIGHT-POINT				
Supplier's address: ceo, GRØNNEGADE 3, 2 SAL , 1107 KØBENHAVN K KØBENHAVN K, DK Model identifier: 270521 ANGLE+						
Lighting technology used:		LED	Non-directional or directional:	DLS		
Light source cap-type		LED Module				
(or other electric interface)						
Mains or non-mains:		NMLS	Connected light source (CLS):	No		
Colour-tuneable light source:		No	Envelope:	-		
High luminance	light source:	No				
Anti-glare shield:		No	Dimmable:	Only with spe- cific dimmers		
Product parameters						
Parameter		Value	Parameter	Value		
		General product p	parameters:			
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		9	Energy efficiency class	E		
Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		726 in Nar- row cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700		
On-mode power (P _{on}), expressed in W		6,0	Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal	0,00		
Networked standby power (P _{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	90		
Outer dimen-	Height	136	Spectral power dis-	See image		
sions without	Width	121	tribution in the	in last page		

85


range 250 nm to 800

nm, at full-load

ing control parts and non-lighting control parts, if any (millimetre)						
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-			
		Chromaticity coordi-	0,434			
		nates (x and y)	0,403			
Parameters for directional light sources:						
Peak luminous intensity (cd)	130	Beam angle in degrees, or the range of beam angles that can be set	40			
Parameters for LED and OLED light sources:						
R9 colour rendering index value	55	Survival factor	-			
the lumen maintenance factor	-					

(a)_{'-'}: not applicable;

(b)_{'-'} : not applicable;

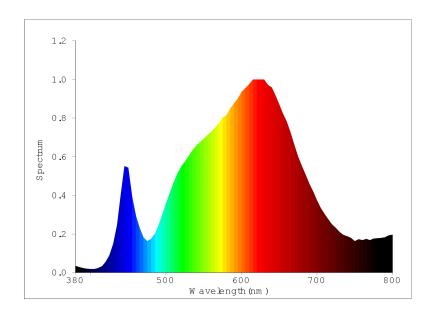

Model placed on the Union market from 06/09/2019



EPREL registration number: 997845 https://eprel.ec.europa.eu/qr/997845

Supplier: LIGHT-POINT A/S (Manufacturer) **Website:**

Customer care service:

Name: ceo Website:

Email: rgo@light-point.com Phone: +4528188080

Address:

GRØNNEGADE 3, 2 SAL 1107 KØBENHAVN K

Denmark