

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** LIGHT-POINT

**Supplier's address:** ceo, GRØNNEGADE 3, 2 SAL , 1107 KØBENHAVN K KØBENHAVN K, DK

**Model identifier:** 270520 ANGLE+

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	LED Module		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------


### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	9	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	726 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power ( $P_{on}$ ), expressed in W	10,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	92
Outer dimensions without separate control gear, light-	Height	136	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	121	
	Depth	85	
			See image in last page


ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,434 0,410
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	130	Beam angle in degrees, or the range of beam angles that can be set	40
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	55	Survival factor	-
the lumen maintenance factor	-		

(a) '-': not applicable;

(b) '-': not applicable;

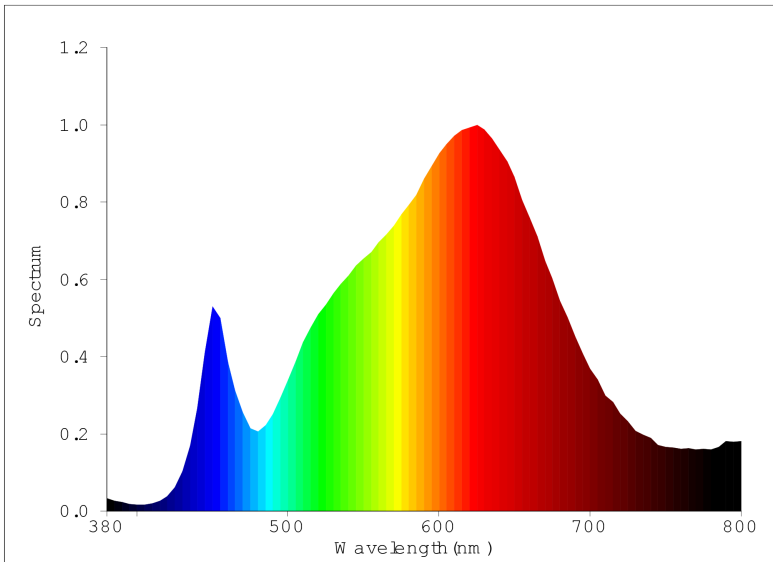

Model placed on the Union market from 06/09/2019



**EPREL registration number:** 997876

<https://eprel.ec.europa.eu/qr/997876>

**Supplier:** LIGHT-POINT A/S (Manufacturer)

**Website:**

**Customer care service:**

**Name:** ceo

**Website:**

**Email:** [rgo@light-point.com](mailto:rgo@light-point.com)

**Phone:** +4528188080

**Address:**

GRØNNEGADE 3, 2 SAL

1107 KØBENHAVN K

Denmark