

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Deko-Light

**Supplier's address:** Product Management, Deko-Light Elektronik Vertriebs GmbH, Auf der Hub 2, D-76307 Karlsbad, DE

**Model identifier:** 346044

## Type of light source:

|   |                  |                                 |                            |
|---|------------------|---------------------------------|----------------------------|
| Lighting technology used:                           | LED              | Non-directional or directional: | DLS                        |
| Light source cap-type (or other electric interface) | other electrical |                                 |                            |
| Mains or non-mains:                                 | MLS              | Connected light source (CLS):   | No                         |
| Colour-tuneable light source:                       | No               | Envelope:                       | -                          |
| High luminance light source:                        | No               |                                 |                            |
| Anti-glare shield:                                  | No               | Dimmable:                       | Only with specific dimmers |


## Product parameters

| Parameter  | Value                   | Parameter  | Value  |
|--|-------------------------|--|--|
| <b>General product parameters:</b>   |                         |  |  |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer  | 7                       | Energy efficiency class  | F  |
| Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 560 in Wide cone (120°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 3 000  |
| On-mode power ( $P_{on}$ ), expressed in W   | 7,0                     | Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal   | 0,00   |
| Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal  | -                       | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set   | 80   |
| Outer dimensions without separate con-   | Height                  | 510  | Spectral power distribution in the<br>See image in last page |
|  | Width                   | 60   |  |
|  | Depth                   | 40   |  |


|   |                   |  |  |                |
|---|-------------------|--|--|----------------|
| trol gear, lighting control parts and non-lighting control parts, if any (millimetre)                                   |                   |  | range 250 nm to 800 nm, at full-load                               |                |
| Claim of equivalent power <sup>(a)</sup>  | -                 |  | If yes, equivalent power (W)                                       | -              |
|   |                   |  | Chromaticity coordinates (x and y)                                 | 0,434<br>0,403 |
| <b>Parameters for directional light sources:</b>  |                   |  |  |                |
| Peak luminous intensity (cd)  | 185               |  | Beam angle in degrees, or the range of beam angles that can be set | 117            |
| <b>Parameters for LED and OLED light sources:</b>   |                   |  |  |                |
| R9 colour rendering index value   | 22                |  | Survival factor  | 0,90           |
| the lumen maintenance factor  | 0,70              |  |  |                |
| <b>Parameters for LED and OLED mains light sources:</b>   |                   |  |  |                |
| displacement factor (cos $\phi_1$ )   | 0,62              |  | Colour consistency in McAdam ellipses                              | 6              |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | .. <sup>(b)</sup> |  | If yes then replacement claim (W)                                  | -              |
| Flicker metric (Pst LM)   | 0,2               |  | Stroboscopic effect metric (SVM)                                   | 0,1            |

(a): : not applicable;

(b): : not applicable;

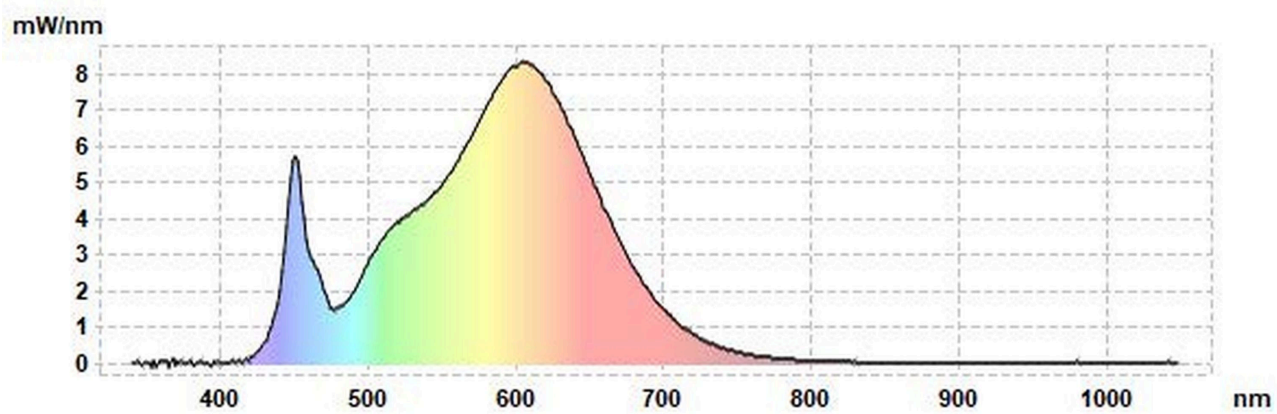

Model placed on the Union market from 02/09/2021



**EPREL registration number:** 1035049

<https://eprel.ec.europa.eu/qr/1035049>

**Supplier:** Deko-Light Elektronik-Vertriebs GmbH (Manufacturer)

**Website:** <https://deko-light.com/>

**Customer care service:**

**Name:** Product Management, Deko-Light Elektronik Vertriebs GmbH

**Website:** <https://deko-light.com/>

**Email:** [pm@deko-light.com](mailto:pm@deko-light.com)

**Phone:** +4972489271724

**Address:**

Auf der Hub 2  
D-76307 Karlsbad  
Germany