

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Vossloh-Schwabe Italia S.p.A.

**Supplier's address:** EPREL Vossloh-Schwabe Italia, Vossloh-Schwabe Italia S.p.A. via strada san Martino,15 47027 Sarsina (FC) Italia

**Model identifier:** DLM\_70C\_16W\_927\_A1

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	solder pads		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

### General product parameters:


Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	17	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 291 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power ( $P_{on}$ ), expressed in W	16,8	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, light-	Height	70	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	70	
	Depth	7	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,458 0,409
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	778	Beam angle in degrees, or the range of beam angles that can be set	120
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	50	Survival factor	0,90
the lumen maintenance factor	0,96		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,70	Colour consistency in McAdam ellipses	3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	.. <sup>(b)</sup>	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,1


(a)'.': not applicable;

(b)'.': not applicable;

DLM\_70C\_xxW\_xyz  
(Readyline SMD Ø70mm)

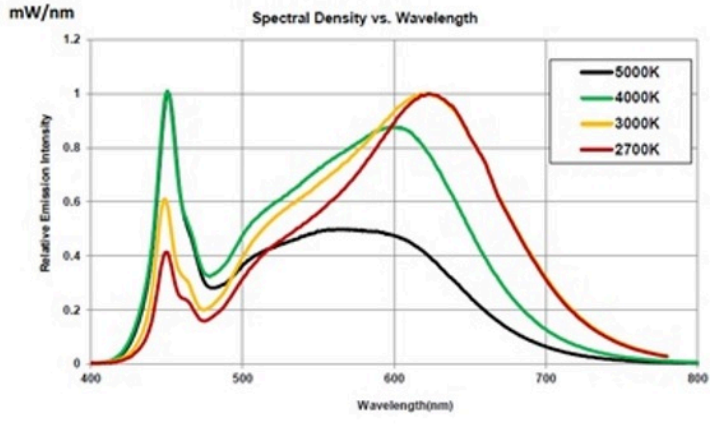

Model placed on the Union market from 04/04/2022



**EPREL registration number:** 1216299

<https://eprel.ec.europa.eu/qr/1216299>

**Supplier:** Vossloh-Schwabe Deutschland GmbH (Manufacturer)

**Website:** <https://www.vossloh-schwabe.com>

**Customer care service:**

**Name:** EPREL Vossloh-Schwabe Italia

**Website:** [www.vossloh-schwabe.com](http://www.vossloh-schwabe.com)

**Email:** [EPREL\\_VSI@vossloh-schwabe.com](mailto:EPREL_VSI@vossloh-schwabe.com)

**Phone:** +39 0547 98111

**Address:**

Vossloh-Schwabe Italia S.p.A. via strada san Martino,15 47027 Sarsina (FC) Italia