Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

| Supplier's name or | trade mark: | OSRAM |
|--------------------|-------------|-------|
|--------------------|-------------|-------|

Supplier's address: LEDVANCE GmbH, Parkring 33, Garching, Germany

Model identifier: AC34026


| _ | • | | | |
|------|-----|-------|------|------|
| Type | Λt | liaht | COLL | rca. |
| IVDE | VI. | HEIIL | SOU | LC. |

| Lighting technology used: | LFL_T5_HE | Non-directional or directional: | NDLS |
|-------------------------------|-----------|---------------------------------|-------|
| Light source cap-type | G5 | directionali | |
| (or other electric interface) | | | |
| Mains or non-mains: | NMLS | Connected light source (CLS): | No |
| Colour-tuneable light source: | No | Envelope: | - |
| High luminance light source: | No | | |
| Anti-glare shield: | No | Dimmable: | Yes |
| Product parameters | | | |
| Parameter | Value | Parameter | Value |

| | Troduct parameters | | | | |
|---------------------------------------------------|-----------------------------------------------------------------------|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--|
| Parameter | | Value | Parameter | Value | |
| | | General product p | arameters: | | |
| <u> </u> | nption in on- 00 h), rounded st integer | 14 | Energy efficiency class | F | |
| dicating if it refe a sphere (360º) | s flux (фuse), ineers to the flux in, in a wide cone errow cone (90º) | 1 350 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 3 000 | |
| On-mode pow pressed in W | ver (P _{on}), ex- | 13,9 | Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal | 0,00 | |
| (P _{net}) for CLS, 6 | candby power expressed in W the second dec- | - | Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set | 80 | |
| Outer dimen- | Height | 563 | Spectral power dis- | See image | |
| sions without | Width | 16 | tribution in the | in last page | |
| separate con- trol gear, light- ing control | Depth | 16 | range 250 nm to 800 nm, at full-load | | |

| parts and non- lighting con- trol parts, if any (millime- tre) | | | |
|----------------------------------------------------------------------------|---|------------------------------------|----------------|
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - |
| | | Chromaticity coordinates (x and y) | 0,440 0,403 |

(a)'-': not applicable; (b)'-': not applicable;

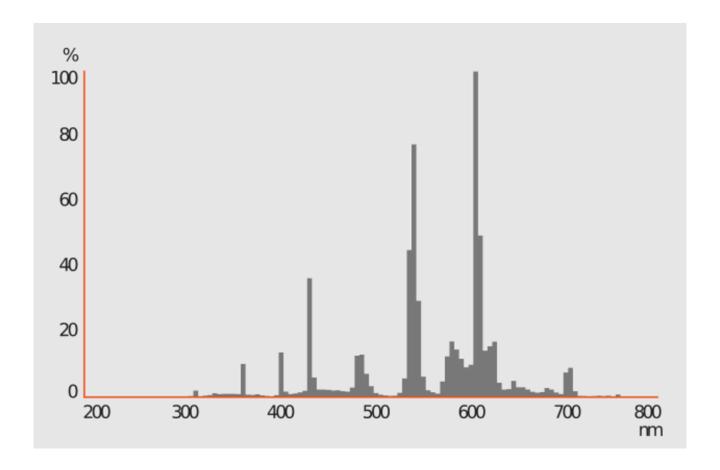

Model placed on the Union market from 03/09/2021



EPREL registration number: 546262 https://eprel.ec.europa.eu/qr/546262

Supplier: LEDVANCE GmbH (Manufacturer) Website: http://www.ledvance.com/

Customer care service:

Name: LEDVANCE GmbH Website:

Email: contact@ledvance.com Phone: +49 89-780673-100

Address:

Parkring 33, Garching, Germany