

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: &Tradition

Supplier's address: &Tradition Sales Support, Kronprinsesse gade 4, 1306 Copenhagen Denmark, DK

Model identifier: Passepartout JH12 LED Module

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	N/A		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:


Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	11	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	991 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2100...2900
On-mode power (P_{on}), expressed in W	11,2	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	94
Outer dimensions without separate control gear, light-	Height	70	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	70	
	Depth	57	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,441 0,400
Parameters for LED and OLED light sources:			
R9 colour rendering index value	63	Survival factor	0,96
the lumen maintenance factor	0,95		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,93	Colour consistency in McAdam ellipses	3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,3	Stroboscopic effect metric (SVM)	0,1


(a): not applicable;

(b): not applicable;

Spectral Power distribution

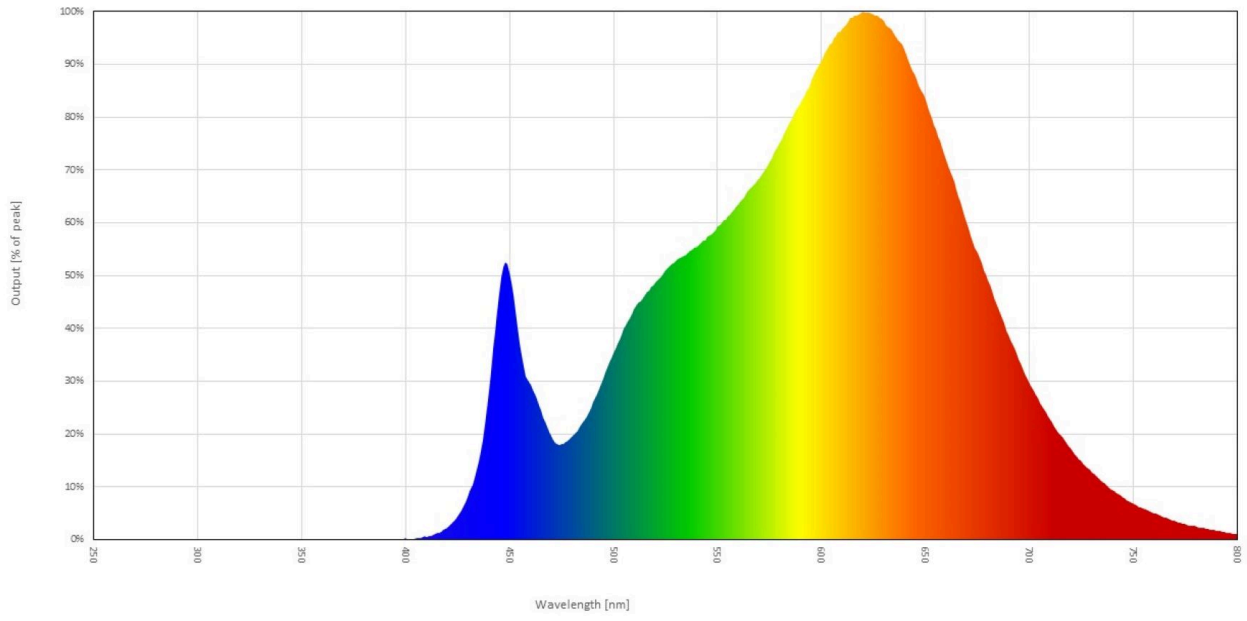

Model placed on the Union market from 01/09/2021



EPREL registration number: 764989

<https://eprel.ec.europa.eu/qr/764989>

Supplier: &Tradition A/S (Manufacturer)

Website:

Customer care service:

Name: &Tradition Sales Support

Website: <https://www.andtradition.com/>

Email: info@andtradition.com

Phone: +45 39200233

Address:

Kronprinsesse gade 4
1306 Copenhagen
Denmark