

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: MÜLLER-LICHT

Supplier's address: MÜLLER-LICHT International GmbH, Goebelstrasse 61/63, DE 28865 Lilienthal, DE

Model identifier: 404005

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	GU10		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	Yes	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------


General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	6	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	350 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	1800...6500
On-mode power (P_{on}), expressed in W	6,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,40
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0,42	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	61	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	50	
	Depth	50	
			See image in last page


ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,436 0,393
Parameters for directional light sources:			
Peak luminous intensity (cd)	570	Beam angle in degrees, or the range of beam angles that can be set	40
Parameters for LED and OLED light sources:			
R9 colour rendering index value	0	Survival factor	0,90
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,92	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	.. ^(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,9	Stroboscopic effect metric (SVM)	0,9

(a)'.': not applicable;

(b)'.': not applicable;

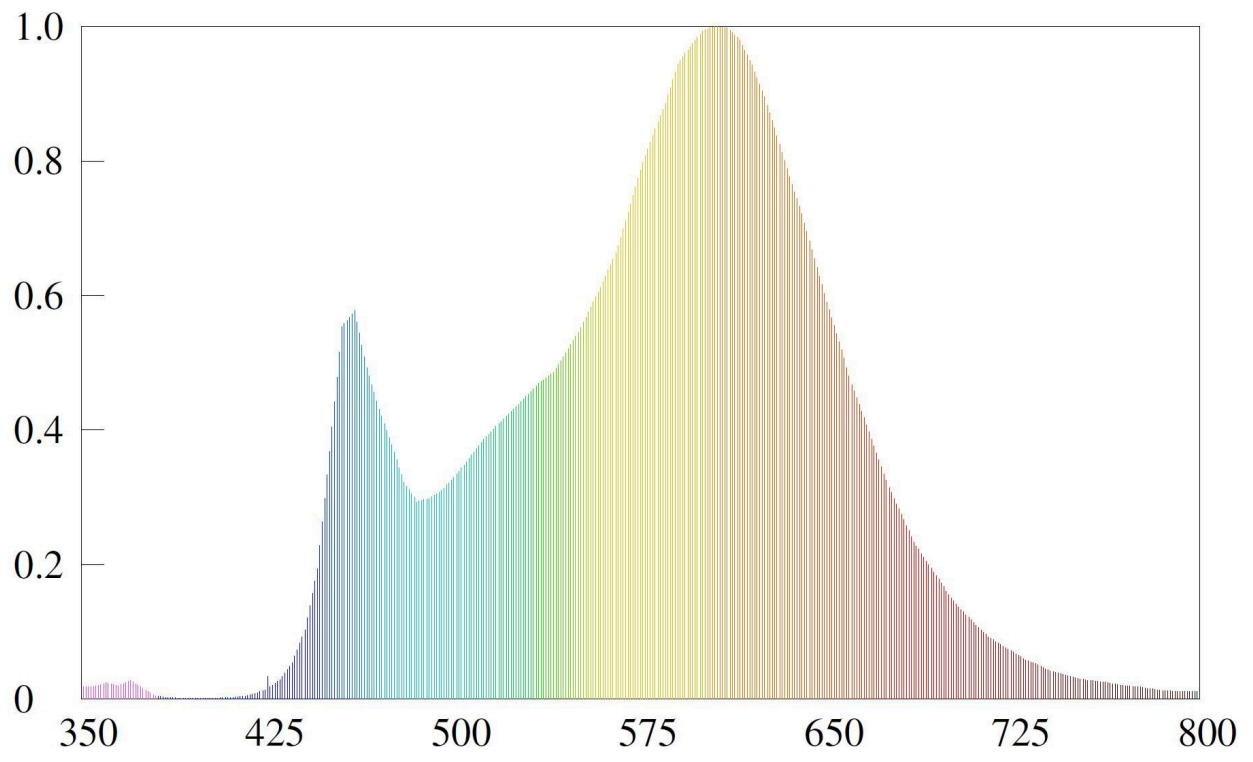

Model placed on the Union market from 01/08/2017



EPREL registration number: 900025

<https://eprel.ec.europa.eu/qr/900025>

Supplier: MÜLLER-LICHT International GmbH (Manufacturer)

Website: www.mueller-licht.de

Customer care service:

Name: MÜLLER-LICHT International GmbH

Website: www.mueller-licht.de

Email: r.haupt@mueller-licht.de

Phone: +49 4298 93700

Address:

Goebelstrasse 61/63
DE 28865 Lilienthal
Germany