

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ANTIDARK

**Supplier's address:** Antidark Aps, damgårdvej 2, 5500 Middelfart , DK

**Model identifier:** 2-215-04-1

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Yes


## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	9	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	726 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power ( $P_{on}$ ), expressed in W	8,9	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, lighting control	Height	60	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	80	
	Depth	80	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,432 0,396
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	1 382	Beam angle in degrees, or the range of beam angles that can be set	113
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	68	Survival factor	1,00
the lumen maintenance factor	0,96		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	1,00	Colour consistency in McAdam ellipses	3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4

(a) '-': not applicable;

(b) '-': not applicable;

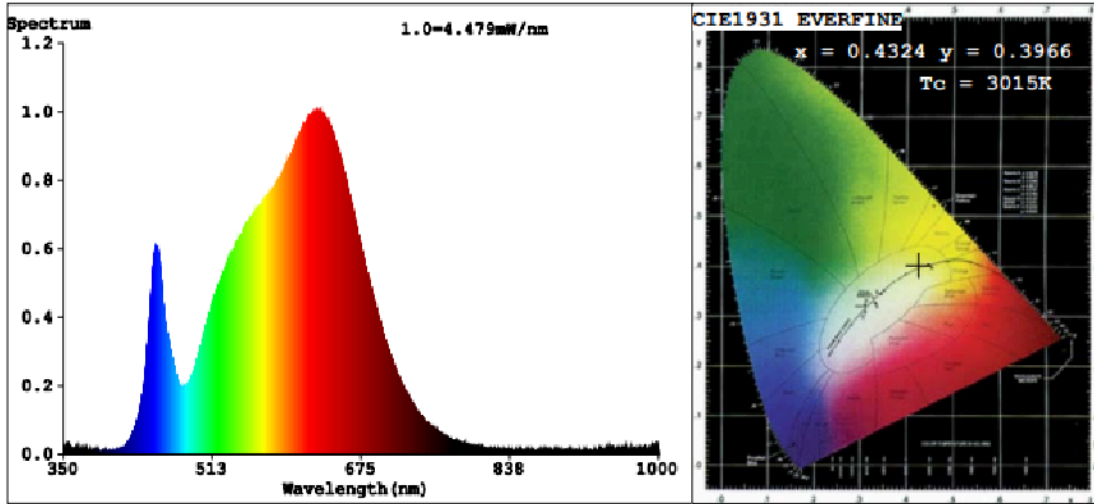

**Color Parameters:**

Chromaticity Coordinate:  $x=0.4324$   $y=0.3966$   $u'=0.2509$   $v'=0.5177$

$T_c=3015K$  ( $Duv=-0.0024$ ) Dominant WL:  $L_d = 583.7nm$  Purity=48.8%

Red Ratio:  $R=25.8\%$  Peak WL:  $L_p=631.2nm$  HWL:  $L_{hd}=163.3nm$

Render Index:  $R_a=92.3$

R1 =93    R2 =95    R3 =93    R4 =92    R5 =92    R6 =92    R7 =94  
 R8 =87    R9 =69    R10=86    R11=91    R12=76    R13=94    R14=95    R15=92

**Photo Parameters:**

Flux = 221.2 lm    Eff. : 24.28 lm/W     $F_e = 792.6$  mW

**Electrical parameters:**

V = 18.22 V    I = 0.5000 A    P = 9.111 W PF = 1.000


LEVEL:OUT    WHITE:ANSI\_3000K

Status: Integral T = 189 ms  $I_p = 51196$  (78%)

Model:

Number:2-215-04-1

Model placed on the Union market from 04/11/2019



**EPREL registration number:** 914834

<https://eprel.ec.europa.eu/qr/914834>

**Supplier:** Antidark Aps (Importer)

**Website:** [www.antidark.dk](http://www.antidark.dk)

**Customer care service:**

**Name:** Antidark Aps

**Website:**

**Email:** [tj@scanstudio.dk](mailto:tj@scanstudio.dk)

**Phone:** +4540187474

**Address:**

damgårdvej 2  
5500 Middelfart  
Denmark